LA--1159

Series..A

[redacted]

[redacted]

TRANSMITTAL OF THE DOCUMENT MUST BE COVERED BY A SIGNED RECEIPT. IT MUST NOT BE LEFT UNATTENDED OR WHERE AN UNAUTHORIZED PERSON MAY HAVE ACCESS TO IT. WHEN NOT IN USE, IT MUST BE STORED IN A LOCKED FILE OR SAFE. WHILE THIS DOCUMENT IS IN YOUR POSSESSION AND UNTIL YOU HAVE OBTAINED A SIGNED RECEIPT UPON ITS TRANSFER TO AN AUTHORIZED INDIVIDUAL, IT IS YOUR RESPONSIBILITY TO KEEP IT AND ITS CONTENTS FROM ANY UNAUTHORIZED PERSON.

[redacted]

"THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE NATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING OF THE ESPIONAGE ACT, 50 U.S.C. 31 AND 32, AS AMENDED. ITS TRANSMISSION OR THE REVELATION OF ITS CONTENTS IN ANY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED AND MAY RESULT IN SEVERE CRIMINAL PENALITIES UNDER APPLICABLE FEDERAL LAWS."

[redacted]

[redacted]

GROUP 1
EXCLUDED FROM AUTOMATIC
DOWNGRADING AND
DECLASSIFICATION

[redacted]

UNCLASSIFIED

UNCLASSIFIED

PUBLICLY RELEASABLE
LANL Classification Group
[signature]
12/1/95

LOS ALAMOS SCIENTIFIC LABORATORY

OF

THE UNIVERSITY OF CALIFORNIA

VERIFIED UNCLASSIFIED
Per
By

May 22, 1950 LA-1159

This document consists of 62 pages

[redacted]

Classification changed to UNCLASSIFIED
by authority of the U. S. Atomic Energy Commission,
Per ALDR(TID-1400-S2)Sept-Oct 1974
By REPORT LIBRARY [signature], 1/10/75

ORALLOY HYDRIDE CRITICAL ASSEMBLIES

[redacted]
Group W-2

Report written by:

Part I : H. C. Paxton
Part II : J. D. Orndoff
Part III: G. A. Linenberger
Part IV : H. C. Paxton

SPECIAL REREVIEW FINAL DETERMINATION Class: U	Reviewers	Class.	Date
	MwR	U	7/10/79
	SAU	U	4/5/82

VERIFIED UNCLASSIFIED
[signature] 12/1/95

[redacted]

UNCLASSIFIED

UNCLASSIFIED

LA-1159

Washington Document Room	1 thru 4
J. R. Oppenehimer	5
Los Alamos Document Room	6 thru 20



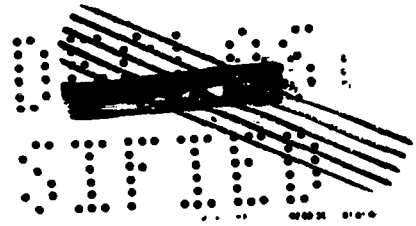

ORALLOY HYDRIDE CRITICAL ASSEMBLIES

ABSTRACT

Part I of this report covers critical-mass determinations for pseudospheres of oralloy hydride composition (approximating UH_3) in 8"-thick Tu and Ni tampers and in the Tu tamper with Ni liner. The critical mass of a hydride cube in the thick Tu also is given. Data on weight and dimensional changes of hydride pieces during the period of use are included.

In Part II are presented the results of Rossi time-scale measurements on the hydride assemblies. Values of alpha at delayed critical and its variation with mass in the neighborhood of delayed critical are given.

Measurements on the activation of various detectors within the hydride assemblies are described in Part III. Results as a function of radial position are given for Au, for Au shielded by Au and by Cd, for S and for fission catchers with U^{235} and U^{238}.

Reactivity changes resulting from the introduction of foreign materials into the hydride assemblies are discussed in Part IV. Apparent regularities with respect to Z and qualitative interpretations of variations with radius are pointed out. From data for various radial positions, changes in critical mass corresponding to small changes in composition and density are computed.

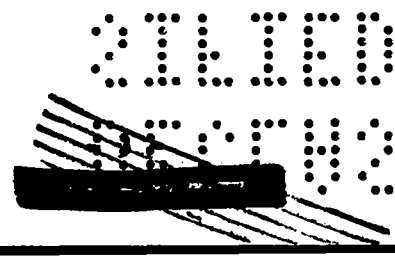

PART I

ORALLOY HYDRIDE CRITICAL ASSEMBLIES

CRITICAL SIZES IN THICK TU AND NI TAMPERS

Introduction

Assemblies of Oy H_{10} C_4 in various tampers were studied by Holloway and Baker[1] early in the history of The Los Alamos Scientific Laboratory. A revival of interest in oralloy hydride for weapon use led to the extension of these measurements to a composition approximating Oy H_3. In spite of discouraging results of IBM computations[2] on hydride gadgets, which were obtained during the course of the new series of tests, a fairly extensive investigation of Oy H_3 assemblies was completed. It is hoped that comparisons between Oy and hydride systems, with their widely differing neutron spectra, may add insight into the behavior of reactive systems in general.

Hydride Composition

This report covers a series of measurements on critical assemblies of an oralloy hydride composition in thick Tu and Ni tampers. The hydride, a mixture of OyH_3 powder, Oy powder and polythene, was prepared in the desired shapes by the plastics section of Group CMR-6[3]. Examples of the shapes used are shown in Fig. I-1. The average empirical formula of the hydride composition is $UH_{2.93}C_{1.08}O_{0.26}$ with small deviations from part to part, and the mean piece density is 7.5 gm/cm^3. Pseudospheres of hydride were assembled

---

(1) Critical Masses of Enriched Uranium Hydrides and Some Related Measurements, M. G. Holloway and C. P. Baker, LA-1035 (12/19/47).

(2) Report on Hydride, S. Moszkowski and D. Libermann, LA-1085 (May, 1950).

(3) Uranium Hydride Fabrication, Final Report, J. S. Church (in preparation).

FIG. I - 1

ORALLOY HYDRIDE SHAPES

out of half-inch cubical units and surrounded by approximately 8"-thick tamper. A constant external tamper surface geometry was maintained for all measurements. The Tu tamper is effectively infinite, as was the case with an Oy metal core.

Assembly System

The hydride assemblies were set up on Topsy, the Pajarito universal machine for operation at delayed critical. A description of Topsy and of its use for measurements of the type to be discussed is given in LA-749.[4] In brief, active material carried on the ram (A in Fig. I-2) may be moved by remote control into a cavity within a water tank (B) or into a cavity within a tamper mass (C). Neutron multiplication measurements[5] in the water tank as a function of hydride mass establish the range of masses that may be stacked by hand in the ram with safety. The water is to simulate the tamping effect of a number of people near the ram; the multiplication limit for hand operations is 10. Once the safety of hand-stacking is established, multiplication measurements on successively larger pseudospheres of hydride raised into the tamper serve as a guide for the approach to delayed critical conditions.

Critical Size of Hydride in Tu Tamper

Results of the water-tank tests on hydride partially surrounded by Tu in the ram are given in Fig. I-3. Multiplication for the largest mass used

---

[4] Polythene-25 Critical Assembly, H. C. Paxton and G. A. Linenberger, LA-749 (9/30/49)

[5] Reference ("unmultiplied") counts were taken with tamper material substituted for the hydride. This led to conservative results, i.e., multiplication values in the water tank were slightly higher than with a polythene-Tu mockup of the hydride as reference configuration.

FIG. I - 2

TOPSY

B
A
C
SECRET

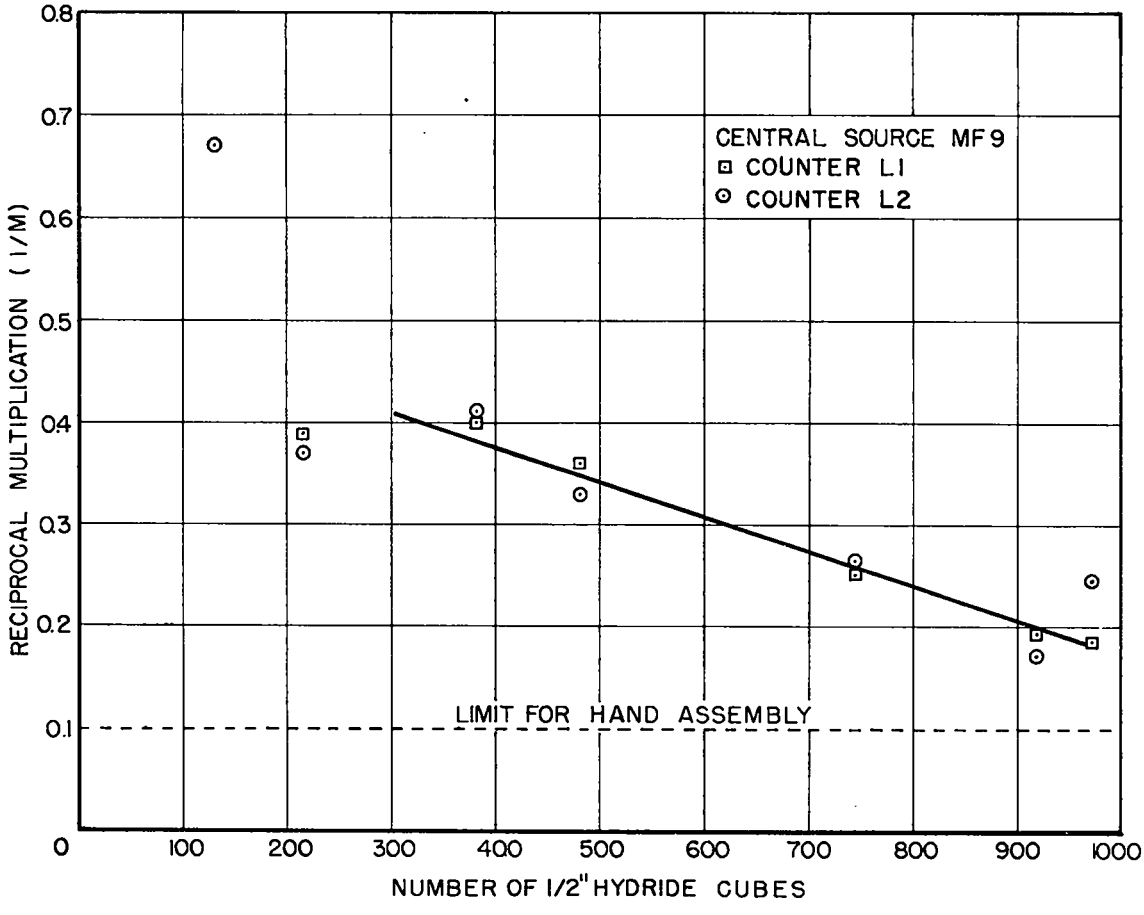

FIG. I-3. SAFETY TESTS - TOPSY WATER TANK
OY HYDRIDE WITH PARTIAL TU TAMPER

(14.7 kg) is about 5, i.e., well below the safety limit for hand-stacking. It may be remarked that hydride in the ram is less sensitive to surrounding water than is Oy metal (each of sufficient quantity to be critical in 8" Tu).

Measurements during the initial approach to delayed critical conditions in the thick Tu tamper are indicated in Fig. I-4. In this case, pseudospheres of hydride were imbedded in Tu on the ram. The critical quantity with both Topsy control rods "in" is seen to be equivalent of 967 half-inch cubes of hydride, or about 14.7 kg.

For neutron-distribution and time-scale measurements, it was necessary to set up a split hydride system as illustrated in Fig. I-5. The top pseudohemisphere, consisting of an hydride "stovelid" and additional pieces supported on it, is suspended within the tamper cavity, and the lower pseudohemisphere, nested in Tu, is carried on the ram. A radial hole (the "glory hole"), through the tamper and into the stovelid permits the use of internal measuring equipment which will not be disturbed by ram assembly. Fig. I-6 indicates results of a reapproach to critical with this split geometry. The critical volume, equivalent to 972 half-inch cubes (the critical mass again is 14.7 kg), is slightly higher than with all hydride in the ram because the stovelid density and H to U ratio were somewhat below the average for other pieces. The effect of each control rod is roughly that of 9 hydride cubes (134 gm hydride) in the outer portion of the pseudosphere.

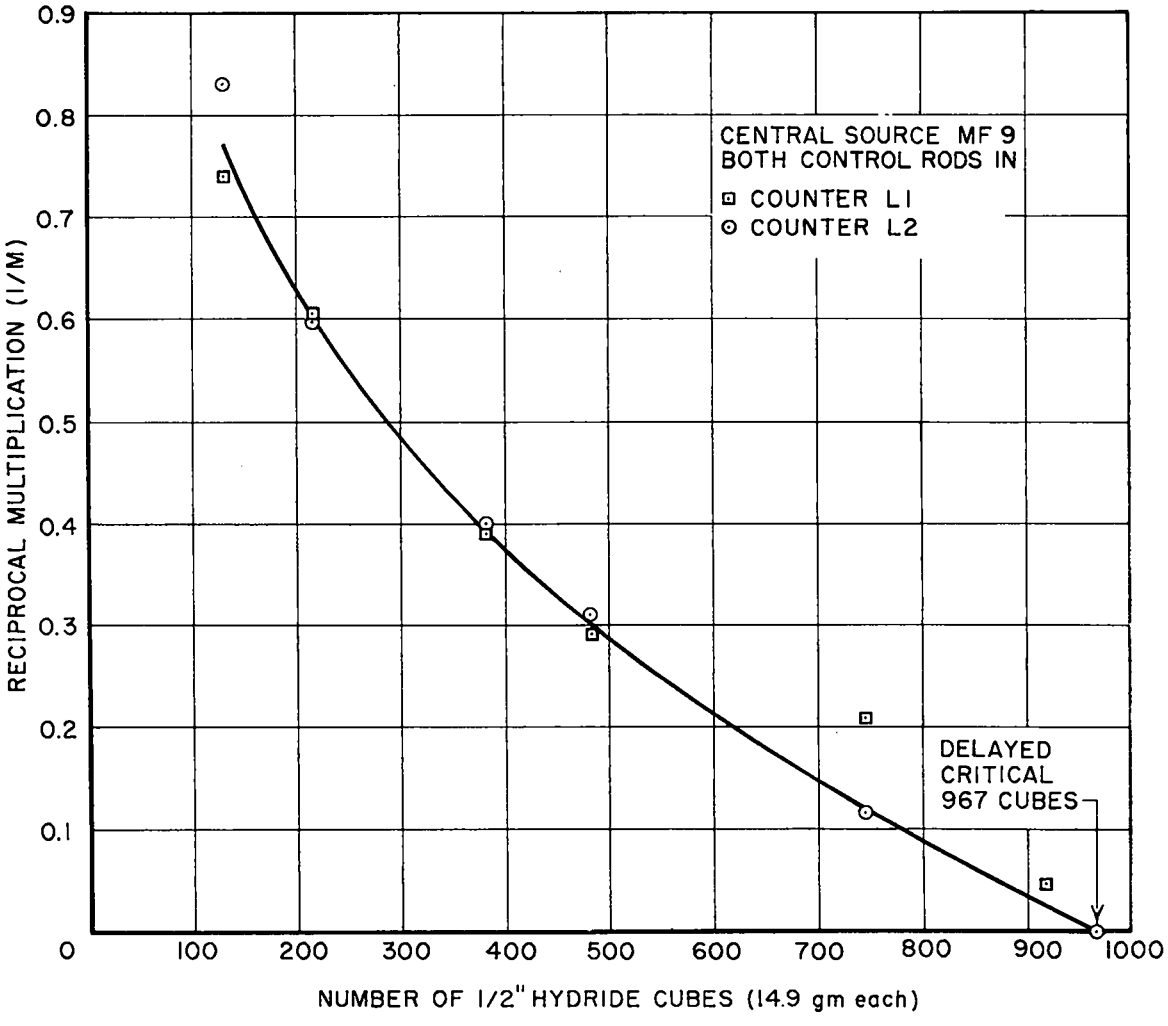

FIG. I-4. CRITICAL SIZE DETERMINATION OY HYDRIDE IN 8" THICK TU TAMPER PSEUDOSPHERE ON RAM

FIG. I - 5

TOPSY SPLIT ASSEMBLY

The stovelid and Oy supported by it form the stationary upper half of the active core. The inner can, mounted on the ram, contains the lower half.

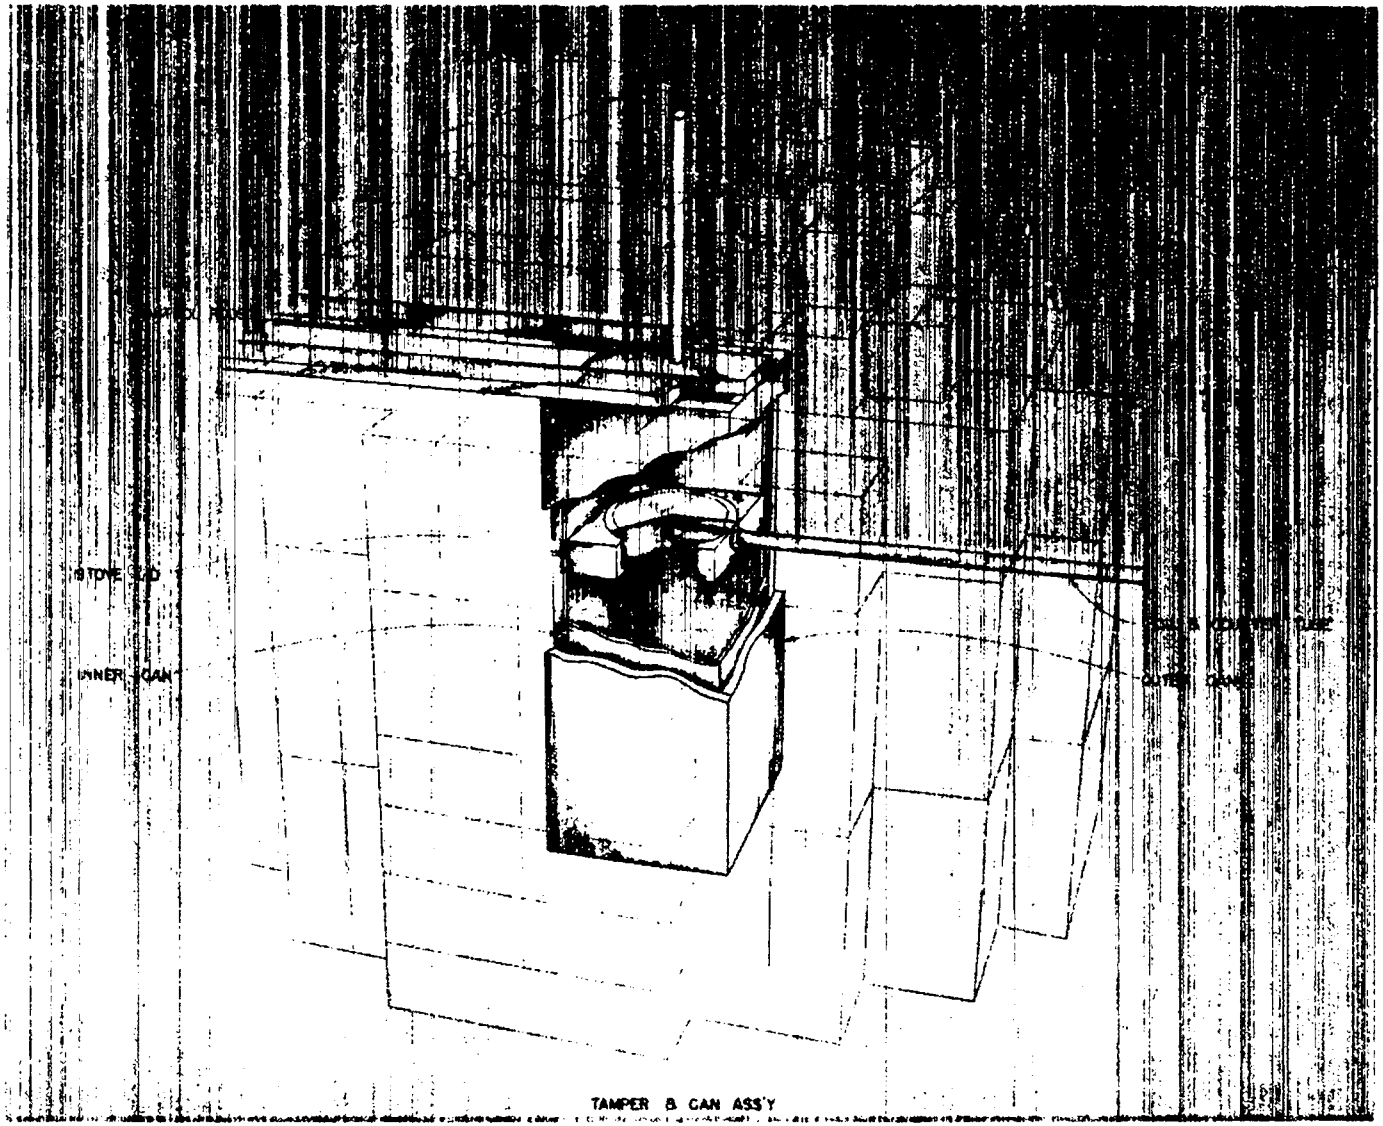
TAMPER B CAN ASS'Y

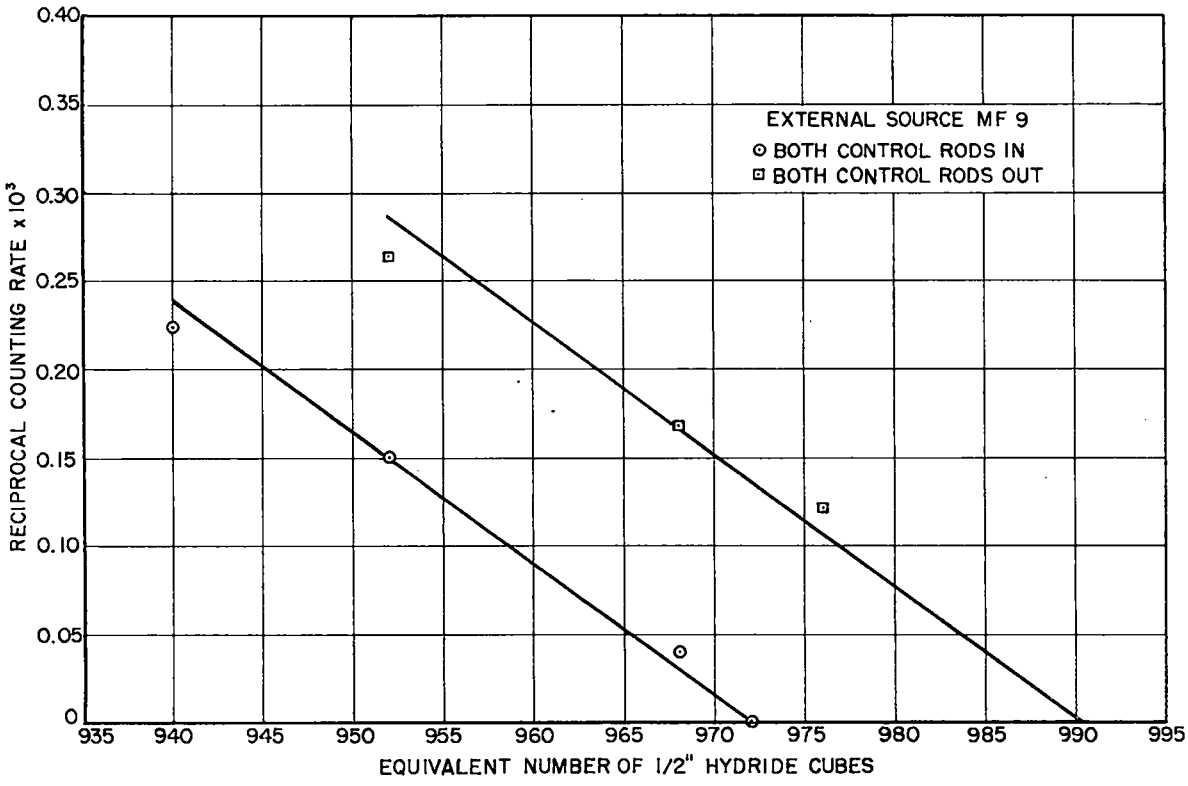

FIG. I-6. CRITICAL SIZE DETERMINATION
OY HYDRIDE IN 8" THICK TU TAMPER
SPLIT PSEUDOSPHERE

Data relevant to the delayed critical assemblies are summarized in the following table.

TABLE I-1

HYDRIDE IN TU	ON RAM	SPLIT
Avg. Empirical Formula	$UH_{2.97}C_{1.11}O_{0.25}$	$UH_{2.92}C_{1.08}O_{0.26}$
Critical Mass	14.68 kg	14.68 kg
Oy Content of Critical Mass	13.54 kg	13.55 kg
Concentration of U^{235} in Oy	93.15 %	93.15 %
Effective Hydride Density	7.40 gm/cm^3	7.35 gm/cm^3
Critical Volume	120.9 in.^{3} 1980 cm^3	121.5 in.^{3} 1990 cm^3
Radius of Sphere of Critical Volume	3.06"	3.07 cm"

TU TAMPER

Tu Thickness at Glory Hole	8"
Tu Mass	2550 kg
Tu Density	19 gm/cm^3

The above figures were obtained during the initial phase of hydride tests. About four months after the original stacking, the critical mass of the Tu-tamped hydride apparently had increased on the order of 1%. It is possible that a tamper change in this interval may be responsible for the effect.

It may be noted that results of Holloway and Baker correspond to a critical mass of 6.8 kg for Oy(93%) H_{10} of density 3.05 gm/cm^3 in a 6½"-thick Tu tamper, or a critical volume of 2230 cm^3.

[redacted]

Critical Size of Hydride in Ni Tamper

For hydride partially tamped by Ni (stacked on the ram) the water-tank tests again indicated no hand-stacking restriction for the largest mass required (Fig. I-7). Fig. I-8 gives data for the approach to critical in the thick Ni tamper with all hydride on the ram, and similar data for the split assembly are shown in Fig. I-9. The critical quantities of hydride, 970 cubes (14.7 kg) and 976 equivalent cubes, respectively, are nearly identical with values for the Tu tamper. The effect per control rod is seen to be the equivalent of about 7 cubes, (104 gm hydride).

Table I-2 is a summary of data for these critical configurations.

TABLE I-2

HYDRIDE IN NI	ON RAM	SPLIT
Avg. Empirical Formula	$UH_{2.97}C_{1.11}O_{0.25}$	$UH_{2.92}C_{1.08}O_{0.26}$
Critical Mass	14.72 kg	14.74 kg
Oy Content of Critical Mass	13.56 kg	13.60 kg
Concentration of U^{235} in Oy	93.15 %	93.15 %
Effective Hydride Density	7.40 gm/cm^3	7.35 gm/cm^3
Critical Volume	121.2 in.^{3} 1990 cm^3	122.0 in.^{3} 2000 cm^3
Radius of Sphere of Critical Volume	3.07"	3.08"

NI TAMPER

Ni Thickness at Glory Hole	8"
Ni Mass	1180 kg
Ni Density	8.8 gm/cm^3

[redacted]

[redacted]

[redacted]

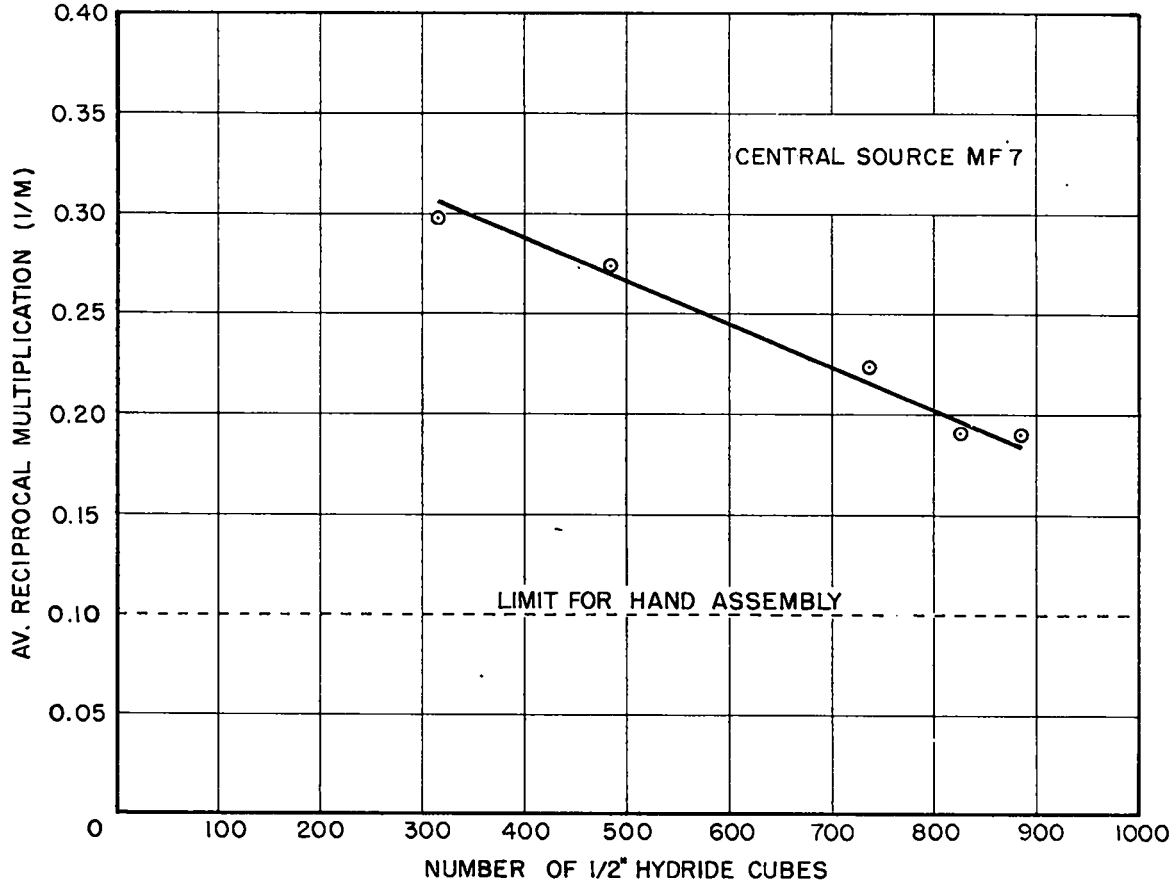

FIG. I-7. SAFETY TESTS – TOPSY WATER TANK OY HYDRIDE WITH PARTIAL NI TAMPER

[redacted]

[redacted]

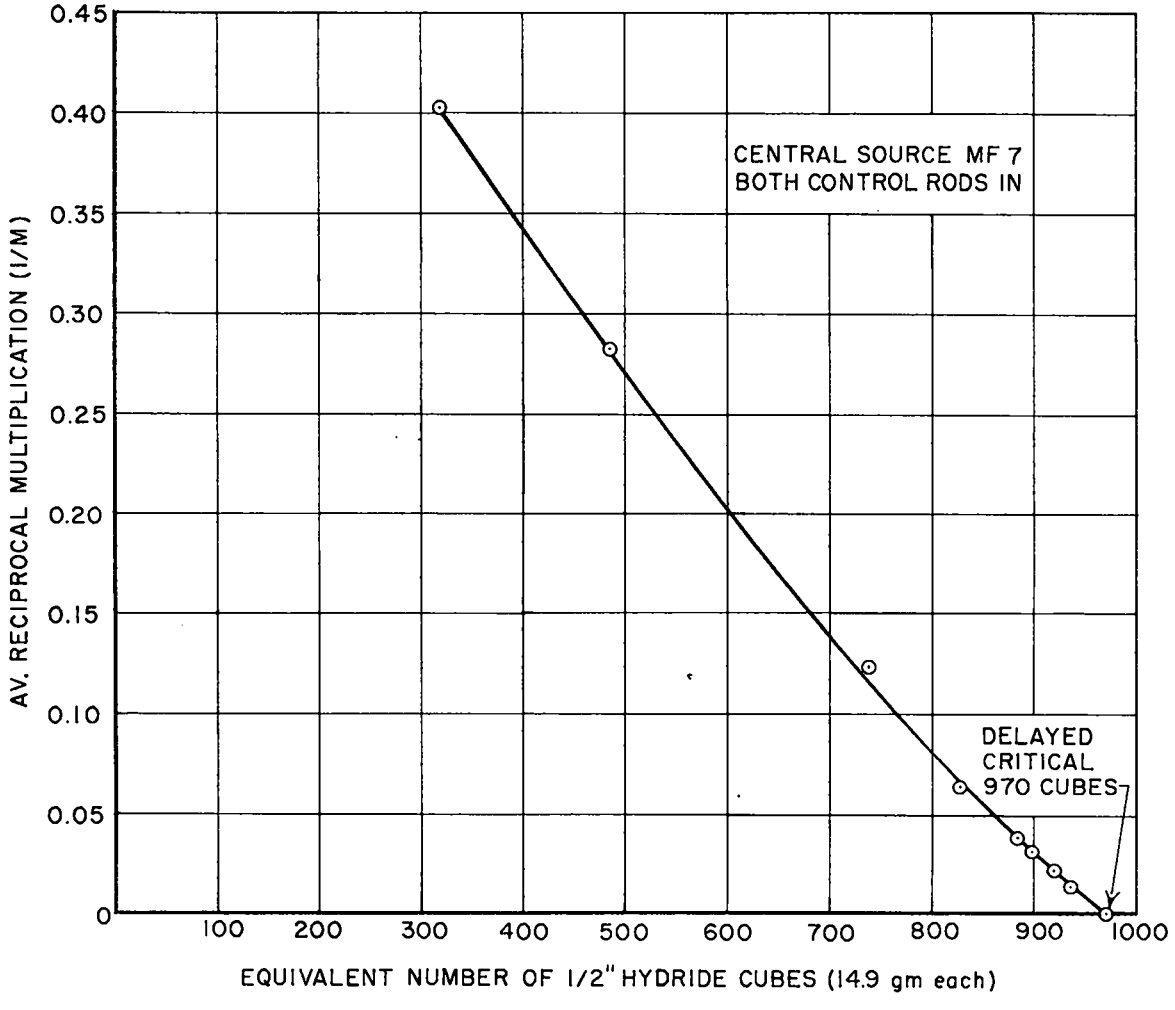

FIG. I-8. CRITICAL SIZE DETERMINATION
OY HYDRIDE IN 8" THICK NI TAMPER
PSEUDOSPHERE ON RAM

[redacted]

[redacted]

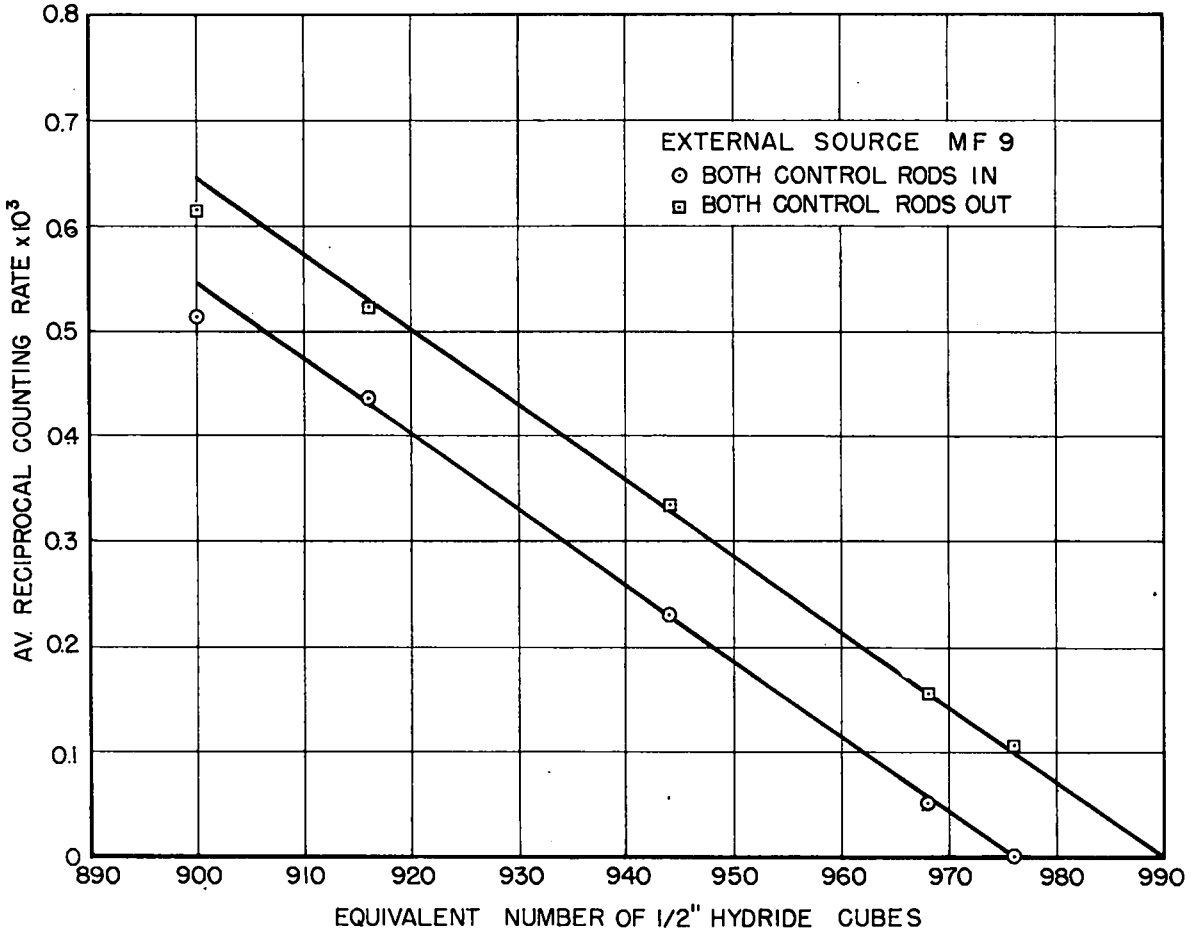

FIG. I-9. CRITICAL SIZE DETERMINATION
OY HYDRIDE IN 8" THICK NI TAMPER
SPLIT PSEUDOSPHERE

[redacted]

Shape Factor

As a guide to the influence of shape variation on reactivity, the critical mass of a hydride pseudocube in the thick Tu tamper was measured. The form was a 5" cube with 1/2" x 1/2" columns lacking along 4 parallel edges (a limitation imposed by Topsy design). To build up the required size, 35 additional half-inch cubes were placed in three groups on separate faces. The critical quantity was equivalent to 995 half-inch cubes as compared with 967 for a pseudosphere. The corresponding shape factor of 0.971 for pseudocube relative to pseudosphere agrees with that determined for Oy metal in thick Tu (0.968 for approximate cube relative to pseudosphere).

Composite Tamper

Material-replacement measurements (see Part IV) showed that substitution of Ni for a half-inch Tu cube adjoining the hydride core increases the reactivity of the system, whether in Tu or Ni tamper. Since critical masses in thick Tu and Ni tampers were essentially equal, this suggests that a composite tamper consisting of a relatively thin Ni layer about the hydride, surrounded in turn by thick Tu, should lead to a reduction in critical mass. According to a computation based on material replacement data, this decrease in critical mass should be 10% for a uniform half-inch Ni liner in a thick Tu tamper.

Accordingly, final hydride tests consisted of critical-mass determinations with one-inch and with half-inch Ni liners (roughly approximated) in the Tu tamper. The liners were imperfect because of Topsy design limitation; e.g., the approximately one-inch Ni layer thinned to $\frac{1}{4}$" at a few locations about the equator of the pseudosphere and extended into the Tu in other places, and there were a few gaps and $\frac{1}{4}$"-thick regions in the approximately half-inch layer.

[redacted]

With the 1" Ni-lined Tu tamper, the critical quantity of hydride was equivalent to 905 half-inch cubes as compared with about 980 cubes for the final critical condition in unlined Tu. This amounts to a 7-½% decrease in critical mass. The assembly with the half-inch Ni liner was critical at the equivalent of 918 cubes or about 6-½% below the value for thick Tu. The latter difference might be expected to increase to about 8% or 9% if deficiencies in the half-inch Ni layer were removed. Although it is apparent that the observed magnitudes are open to question because of geometrical compromises, the expected effect appears to have been established.

Hydride Stability

The hydride was set up in Topsy for five and one-half months. During this time, weights and dimensions of six half-inch cubes and one 1" x 1" x 2" piece of hydride were checked periodically. The percent changes for individual pieces are given in Figs. I-10 and I-11. The weight gain in five and one-half months averaged 0.085% for the half-inch cubes and was 0.04% for the 1" x 1" x 2" block, and the average increase in linear dimensions was 0.2% for the half-inch cubes and 0.07% for the larger piece. The nearly constant rate indicated in Fig. I-10 is considered more reliable than the apparently decreasing rate of Fig. I-11 -- a zero error of 0.0005" could account for the knee apparently formed by the 54-day points in the latter group of curves.

[redacted]

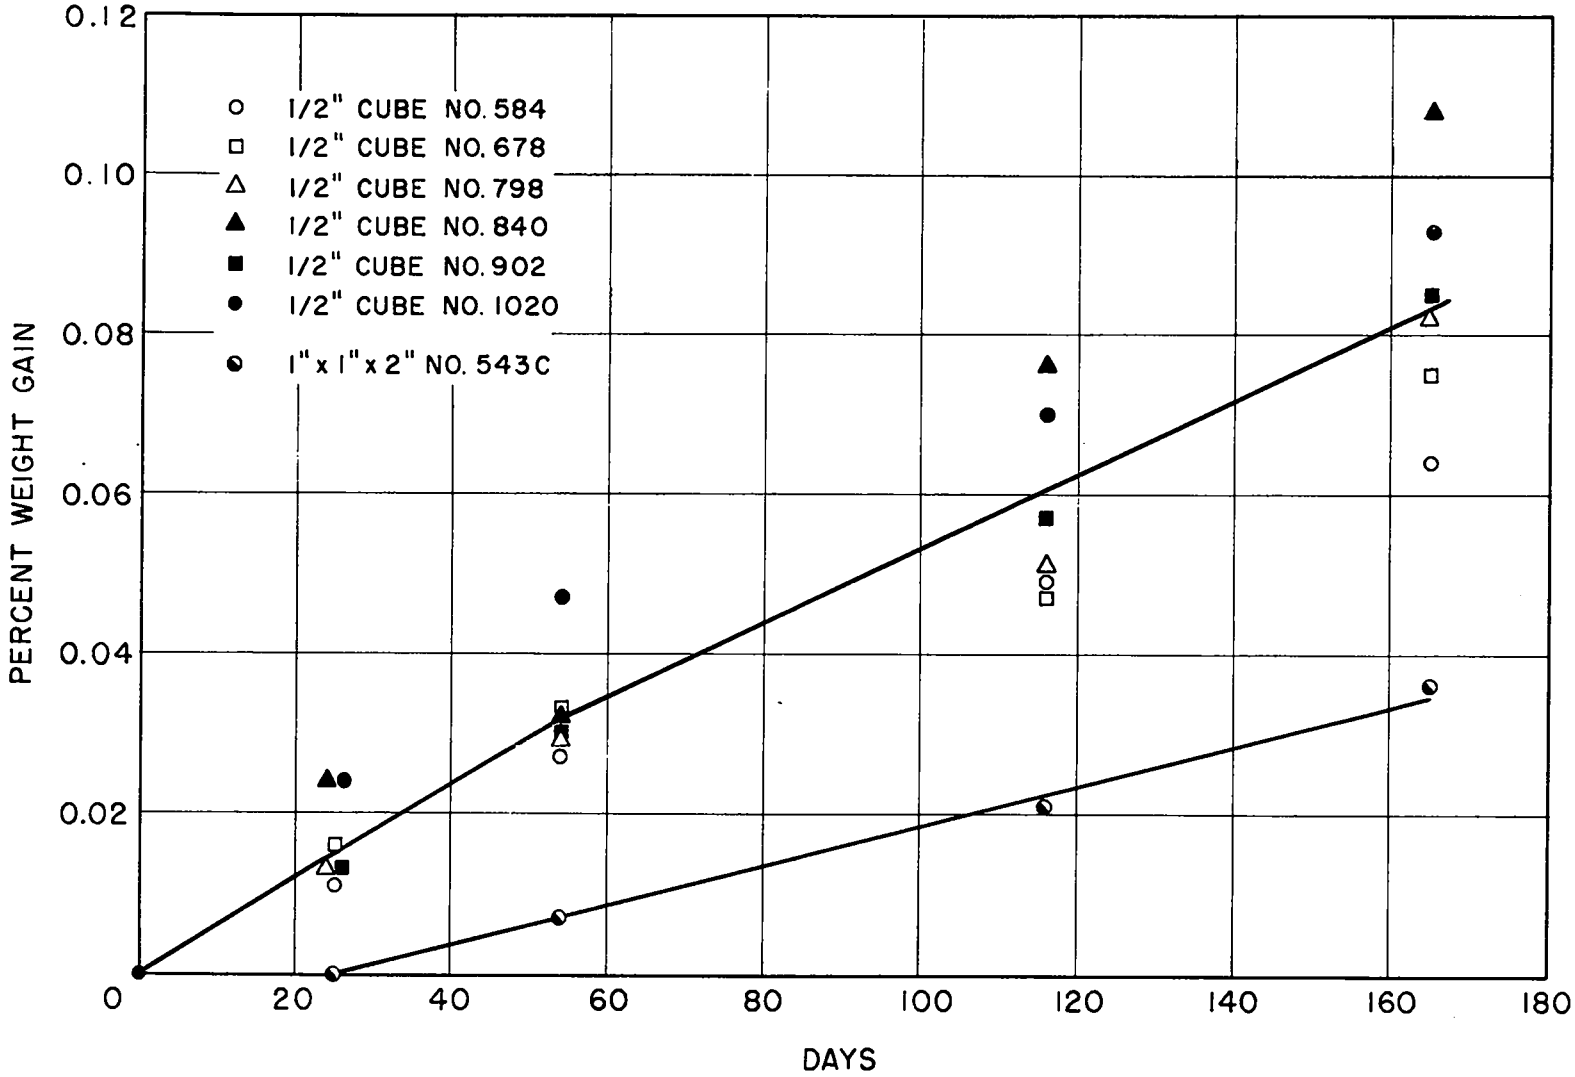

FIG. I-10 WEIGHT GAIN OF HYDRIDE SAMPLES
DURING CRITICAL TESTS

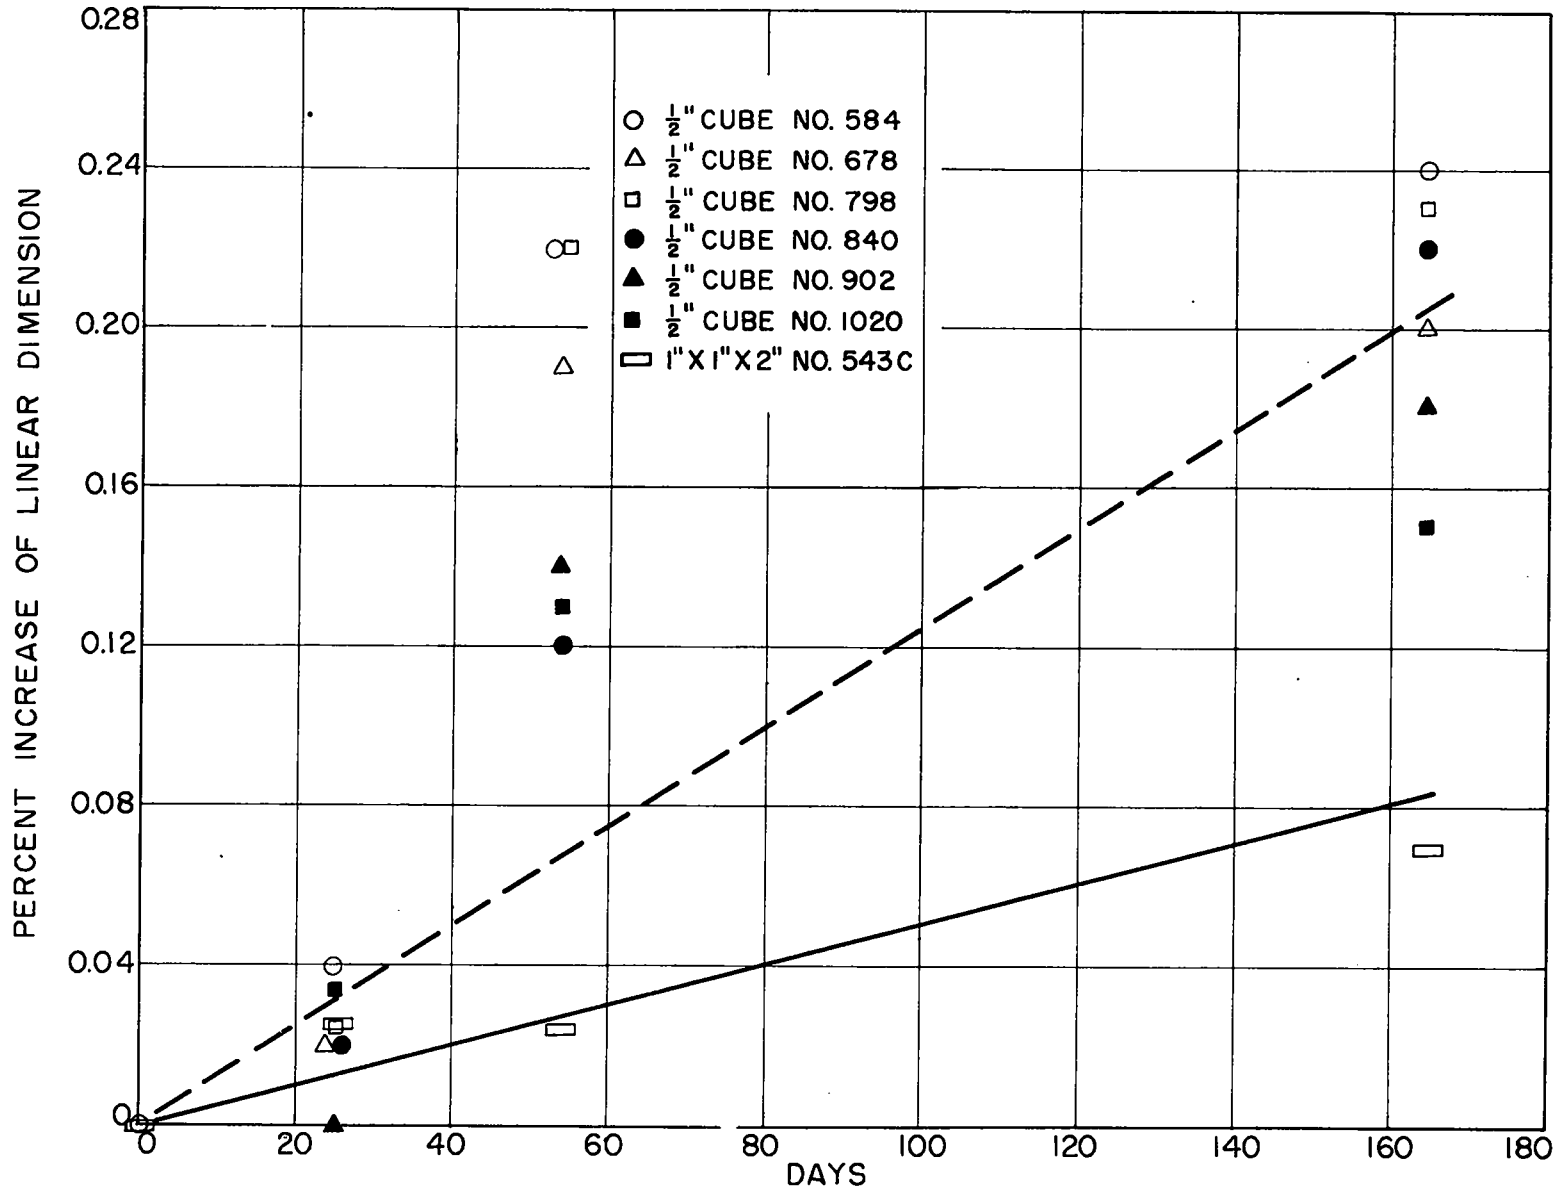

FIG. I-11 DIMENSIONAL INCREASE OF HYDRIDE SAMPLES DURING CRITICAL TESTS

[redacted] LAS
SIFIED

PART II

TIME-SCALE MEASUREMENTS ON HYDRIDE ASSEMBLIES

The general procedures for making measurements of α by the Rossi method on near-critical assemblies have been described in LA-744[1]. The apparatus used consisted of (1) detector, (2) amplifier-discriminator and (3) time analyzer.

The neutron detectors employed were U^{235} spiral fission chambers. These chambers were approximately 7/8 inch in diameter and fit snugly into the 7/8-inch "glory hole" in the tamper. Since the glory hole in the hydride core was only half-inch in diameter, the detectors were inserted up to the tamper-hydride interface; this resulted in a minimum perturbation of the assembly. The foils in the spiral chambers contained 2 milligrams of U^{235} per cm^2 ($\sim$0.45 gm total). These thick foils did not give a pulse-height plateau, but did give a high efficiency. In operation, the discriminators were set low enough that a few alpha background pulses were recorded.

The new model 502 pulse amplifiers were used and have proved to be superior to the previously used model 501 amplifiers. Output pulses were about 0.5 microseconds total width. Very little trouble was experienced with these amplifiers "ringing", and they are much superior to the old amplifiers in this respect. The amplifiers fed into a special high-speed discriminator which drove the 1200 feet of cable terminated in 75 ohms. The final pulse input to the time scale apparatus consisted of square, equal height pulses 0.3 microseconds wide and 18 volts high. There was very little straggling of

(1) Time Scale Measurements by the Rossi Method, J. Orndoff and C. Johnstone, LA-744 (Nov. 9, 1949).

SIFIED

[redacted]

pulse heights. The over-all counting system was quite stable. The system was operated at extreme gain and did pick up some noise pulses when the Topsy controls were operated. This noise background was not objectionable since it was not necessary to touch the controls during a Rossi run except for some slight control rod adjustments.

The time analyzer has been described in great detail in LA-744, consequently it will not be discussed in this report. The 3 microsecond channels proved to be the optimum width for all the hydride measurements. A few check measurements were made using 10 microsecond channel widths.

Measurements were made of α at critical and at various subcritical points. The subcritical points were obtained by stacking up to critical and then removing cubes in the required steps. The steps used were minus 4, 8, 12 and 16 half-inch hydride cubes. The cubes were removed from the outside of the hydride pseudosphere in such a fashion that they were representative of an outside layer of material. The mass increments removed, Δm, presumably produced equal increments of change in the reactivity, ΔK. No attempt was made to evaluate the K at different values of reactivity.

Fig. II-1 shows a plot of the α determinations on the tuballoy tamped hydride assembly. The P_c plotted is the probability after receiving a count, of receiving a second count originating from the same chain after a time, t, within the interval of time, Δt, equal to a channel width. It has been shown that these coincidences have the time dependence $e^{\alpha t}$ so that alpha is determined from the slopes of the curves. The mean errors indicated on the last points are the maximum encountered, as statistics are much better for the earlier channels.

The same data for the nickel tamped assembly is collected in Fig. II-2. The series of experiments with the two different tampers were identical in all respects. The tamper stacking was the standard 8 inch tamper and all details

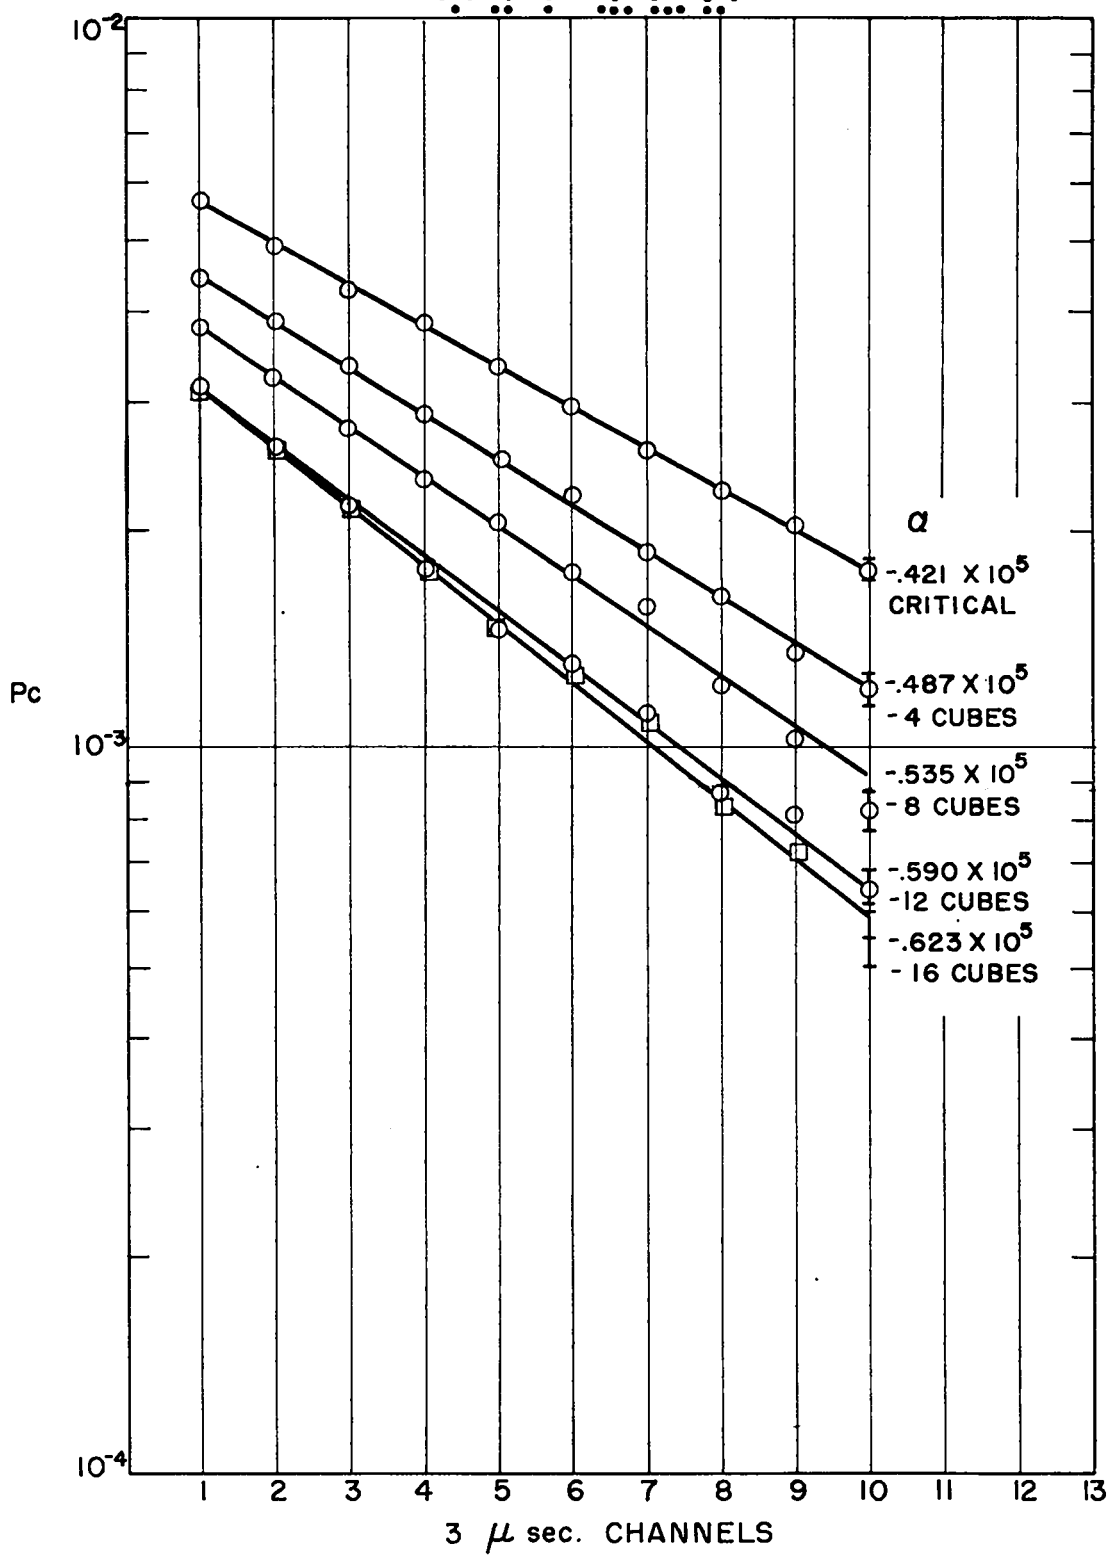

FIG. II - 1 AVERAGE HYDRIDE - TUBALLOY ROSSI MEASUREMENTS

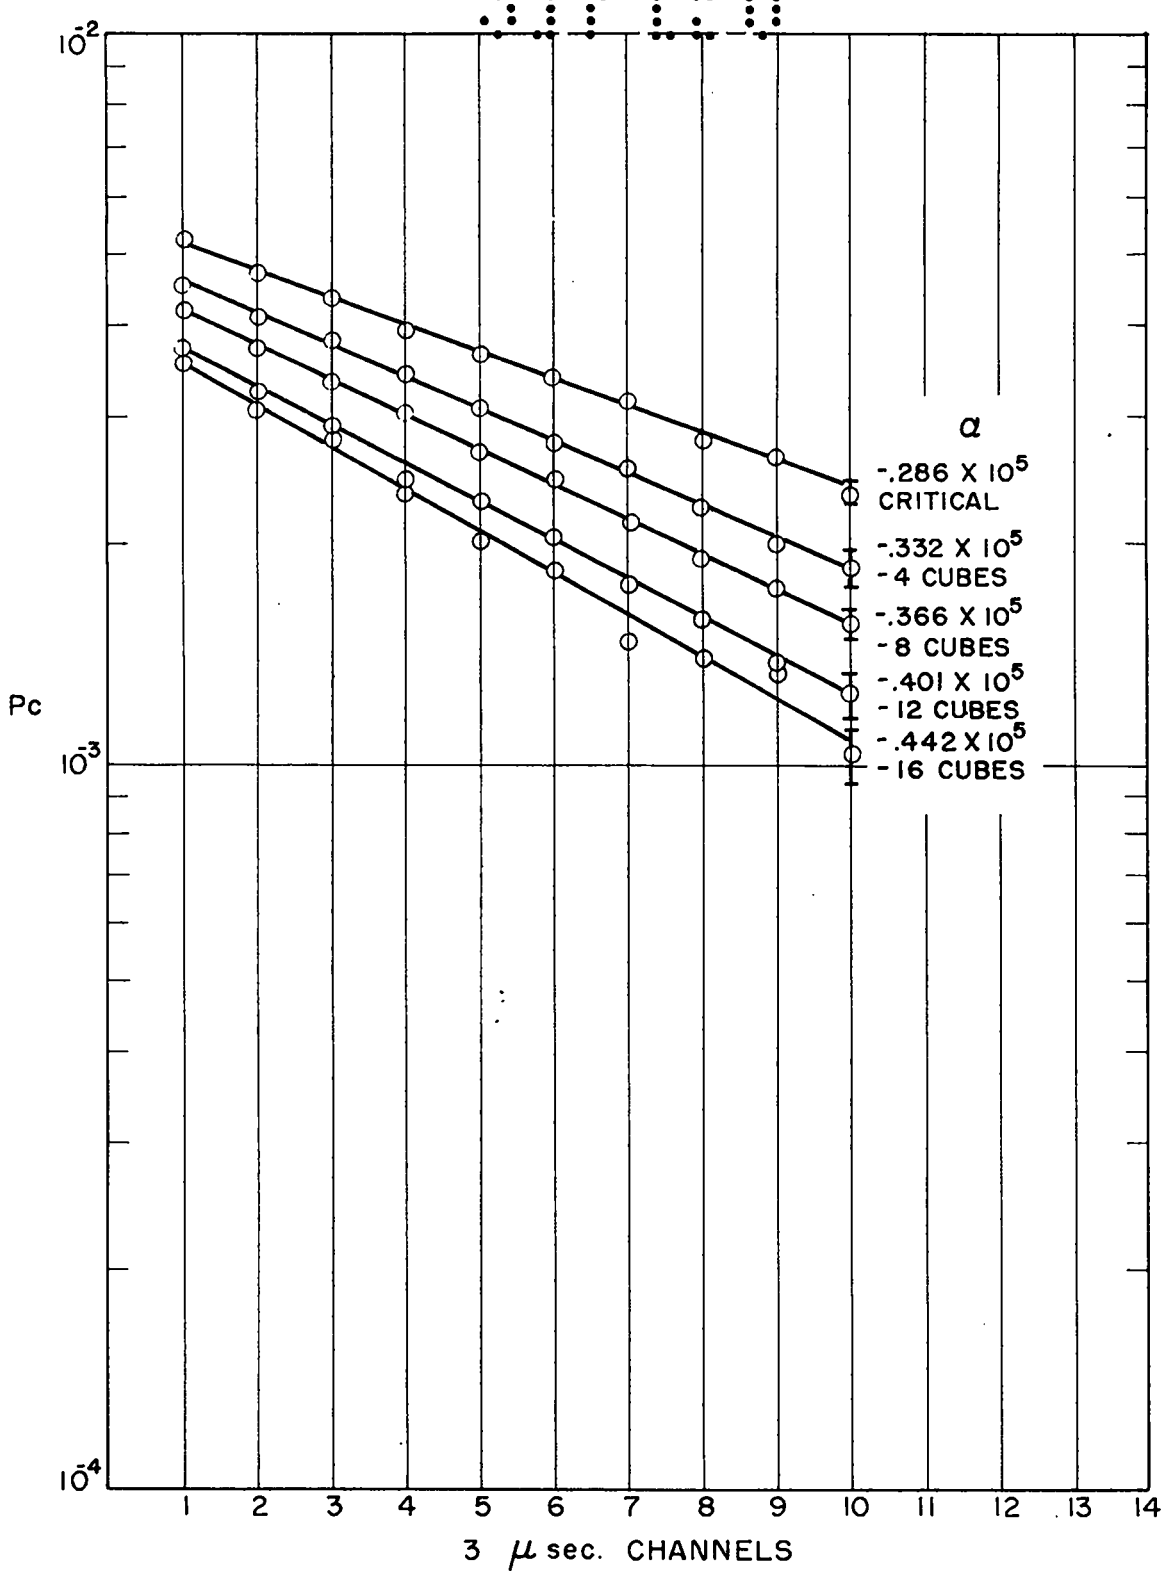

FIG. II-2 AVERAGE HYDRIDE-NICKEL ROSSI MEASUREMENTS

of the tuballoy system including the inner and outer cans, the can on the ram and the tamper itself were faithfully reproduced in the nickel tamper. As it happened, the critical masses also were practically identical. A summary of all the data is given in the table below (Table II-1).

TABLE II-1

TUBALLOY TAMPER

Δ m (gm)	$-\alpha$ (sec^{-1})	τ_o (sec)
0	0.421×10^5	1.8×10^{-7}
-59.6	0.487×10^5	
-119	0.535×10^5	
-179	0.590×10^5	
-238	0.623×10^5	

NICKEL TAMPER

Δ m (gm)	$-\alpha$ (sec^{-1})	τ_o (sec)
0	0.286×10^5	2.7×10^{-7}
-59.6	0.332×10^5	
-119	0.366×10^5	
-179	0.401×10^5	
-238	0.442×10^5	

The value of τ_o, the mean life of a neutron in the assembly, was obtained from the relation

$$\alpha = \frac{K_p - 1}{\tau_o}$$

where K_p is the average number of prompt daughter neutrons per neutron. At delayed critical, the value of $K_p - 1$ was taken to be .0076 which is equal to the fraction of neutrons that are delayed. This will be true only if the

effectiveness of delayed neutrons for producing fissions is the same as that for prompt neutrons. Such an assumption may not be justified. If delayed neutrons are more effective for producing fissions than prompt neutrons, the value of τ_d quoted will be too low.

In order to compare the values of α measured for the present hydride assembly with values for other assemblies, the results of some previous measurements are listed in the table below.

TABLE II-2

ACTIVE MATERIAL	TAMPER	REACTIVITY LEVEL	$-\alpha$ SEC^{-1}	REFERENCE
Oy	Tu	Critical	0.37×10^{6}	LA-744
UH_{10}	BeO	Approx. Crit.	0.18×10^{4}	LA-1035
UH_{10}	WC	Approx. Crit.	0.79×10^{4}	LA-1035

The variation of α with mass is plotted in Fig. II-3 for both tampers. These curves give values of $d\alpha/dm$ equal to 0.93×10^{2} $sec^{-1}gm^{-1}$ for the tuballoy tamper and 0.66×10^{2} $sec^{-1}gm^{-1}$ for the nickel tamper. The differences observed in α and in $d\alpha/dm$ can be interpreted as being due to tamper alone since the cores in the two cases were identical. The nickel tamper causes considerable slowing down of the reaction indicating that nickel is probably considerably less favorable for hydride weapon use than tuballoy from the point of view of time scale.

A progressive increase of α over a period of months was observed with the hydride assembly. The increase was sufficiently large that any possibility of accounting for it on the basis of experimental uncertainties must be discounted. A graph of the time variation of α is given in Fig. II-4. The uncertainties ascribed to the points are considered to be the maximum experimental uncertainties. Weights and sizes of hydride cubes did not change

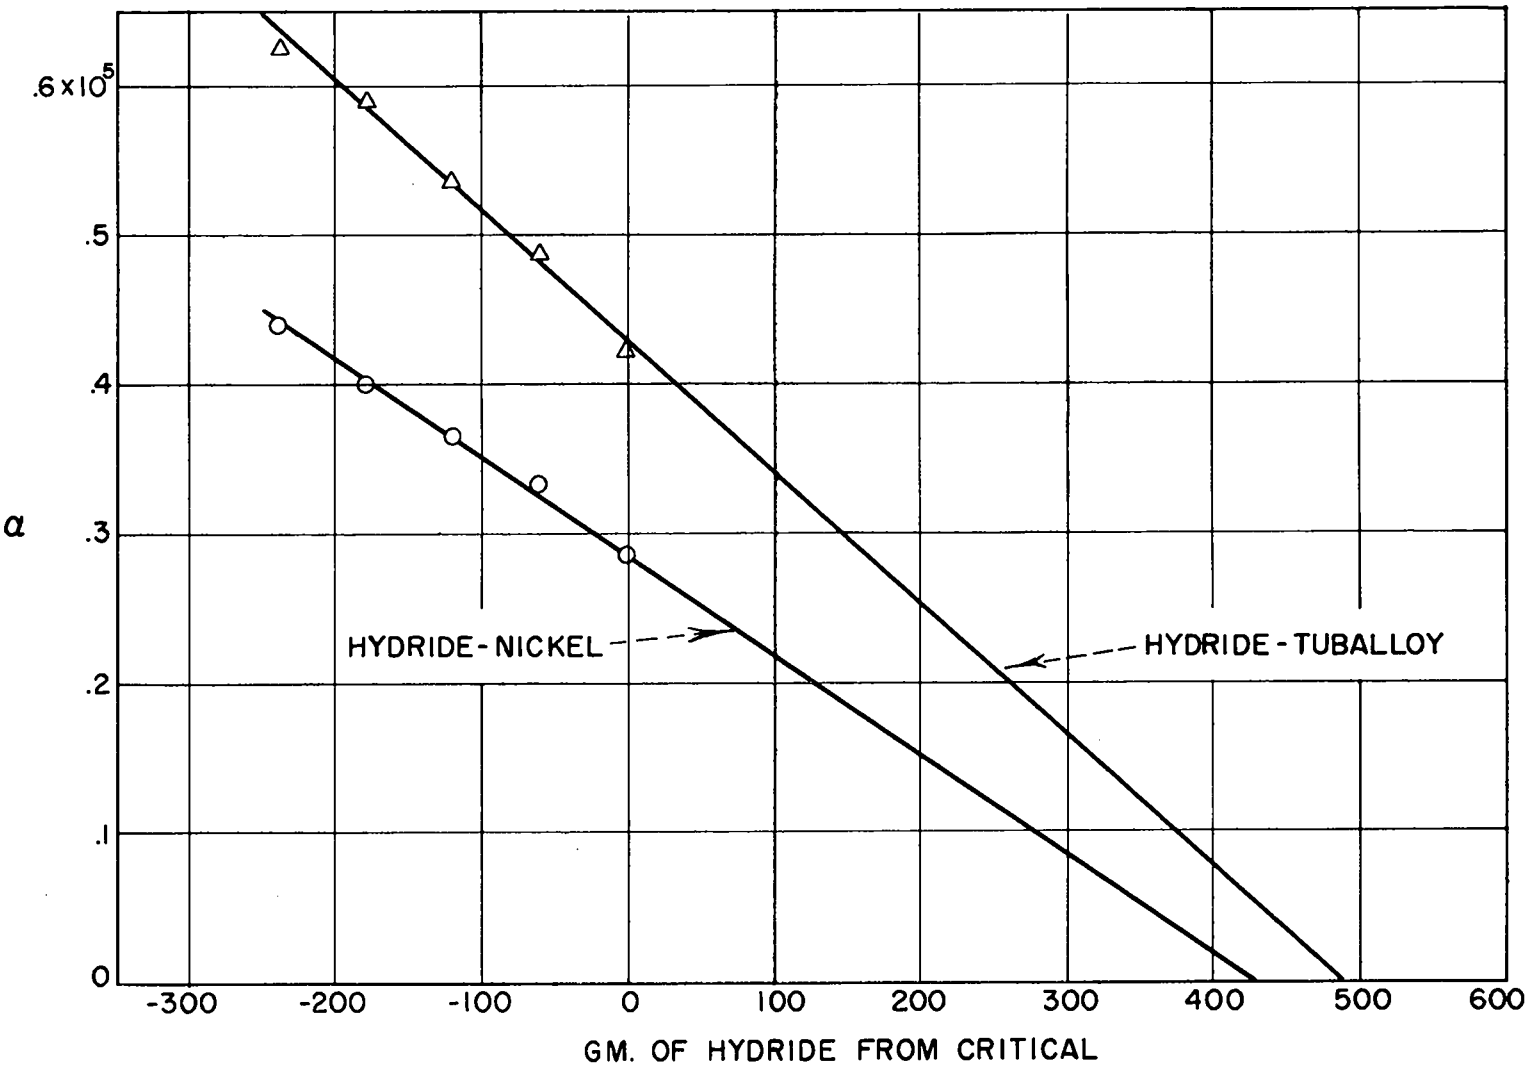

$-\frac{\partial I}{\partial \alpha}$

FIG. II-3 ROSSI DATA

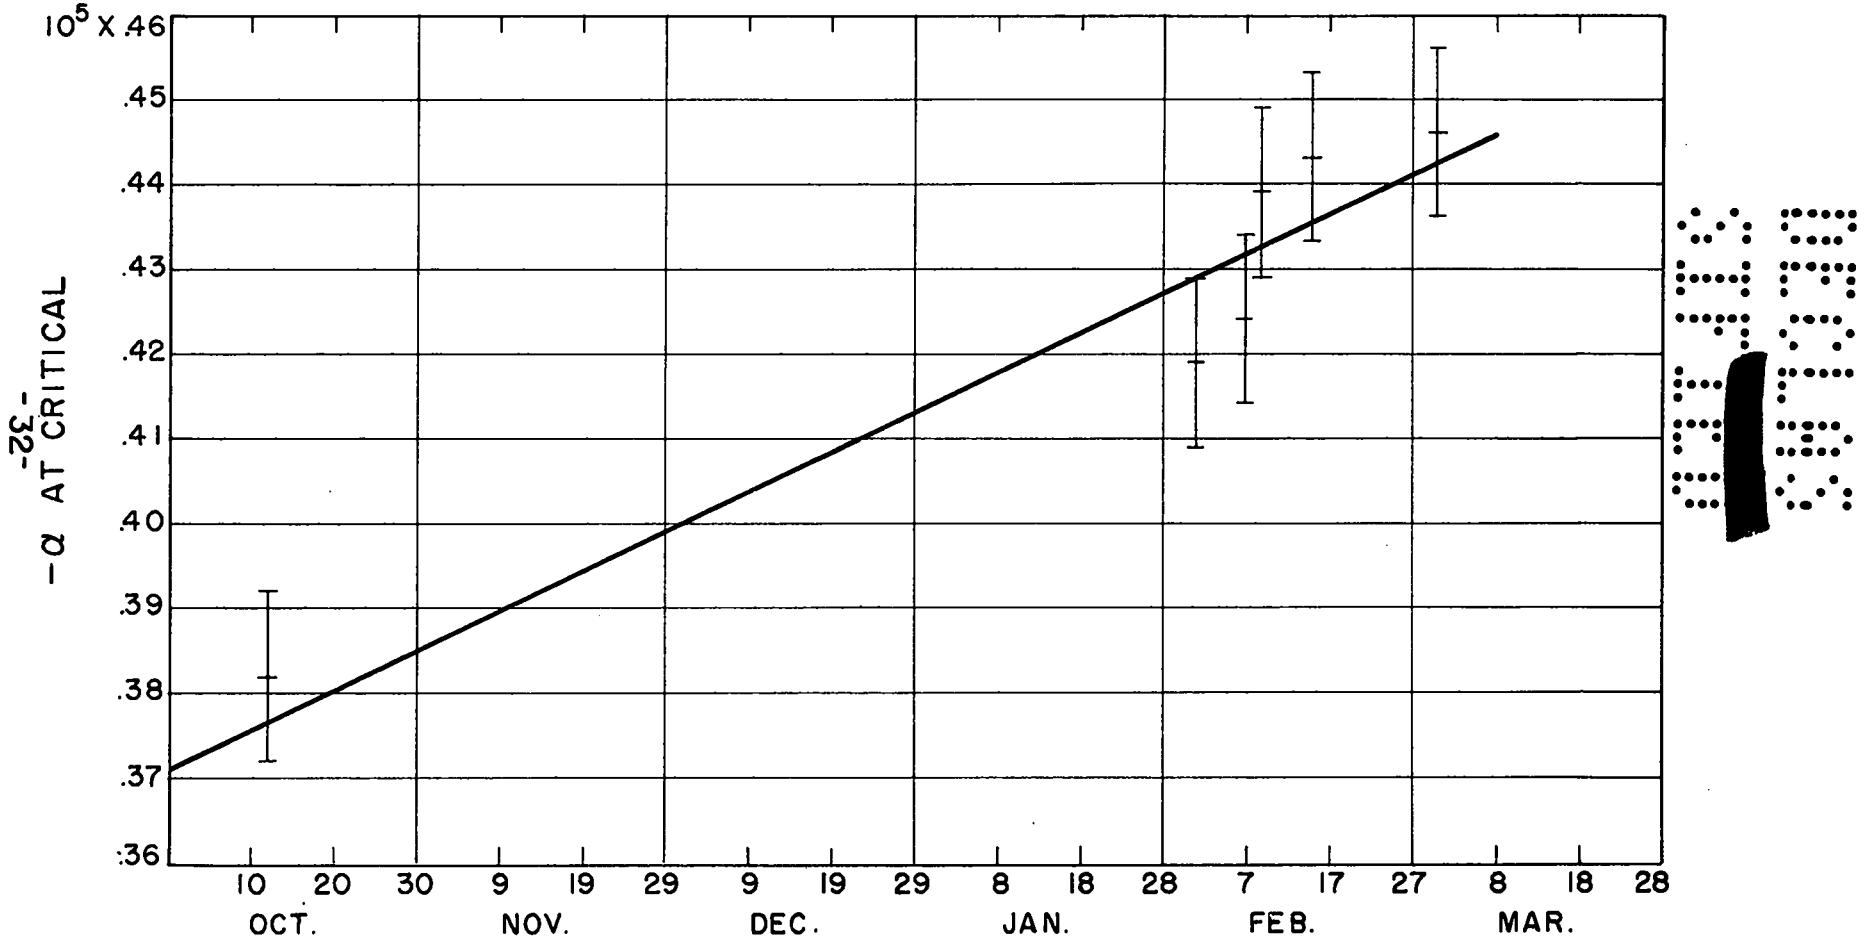

FIG. II-4 VARIATION OF α WITH TIME FOR HYDRIDE-TUBALLOY

appreciably during the period (Part I). There is the possibility that the plastics in the hydride mixture decomposed with loss of hydrogen under the influence of ionizing radiation.

The Rossi measurements reported for the tuballoy and nickel tampers were done within about one month of each other. The "age" effect on α might have changed α by a few percent during this interval of time.

[redacted]

PART III

NEUTRON DISTRIBUTION STUDIES

The methods used in making these measurements have been described in detail in LA-749, which deals with the mock-hydride reactor, the only difference being that all beta activity measurements for the present report were made with methane-flow proportional counters calibrated for each type of detector used.

Detectors of gold, sulphur, oralloy (containing 94% U^{235}), and U^{238} (ratio of U^{238} to U^{235} is about five thousand to one) were used, the reactions of interest being (n,γ) for the gold, (n,p) for the sulphur (effective threshold ca. 3 Mev), and fission for U^{235} and U^{238}. Both the gold and the sulphur were in the form of 0.49" diameter foils, the gold being 5 mils thick and the sulphur about 0.12" thick (0.60 gm. pressed into a pellet). The U^{238} and oralloy were in the form of 1 mil foils 0.44" diameter, and were irradiated in contact with 10 mil celluloid fragment catcher foils of the same diameter. These detectors were distributed at various radii throughout the hydride and tamper, and were irradiated by running the reactor at delayed critical.

The results are presented graphically in Figs. III-1 through III-5, for which the total number of disintegrations per atom of detector (for standard irradiation conditions) is plotted against position of detector in the assembly. Irradiations were standardized by monitoring with a sulphur pellet placed at the center of the reactor during each irradiation. Fig. III-6 gives the ratio of the fission rate of U^{238} to that of oralloy as a function of radius.

[redacted]

[redacted]

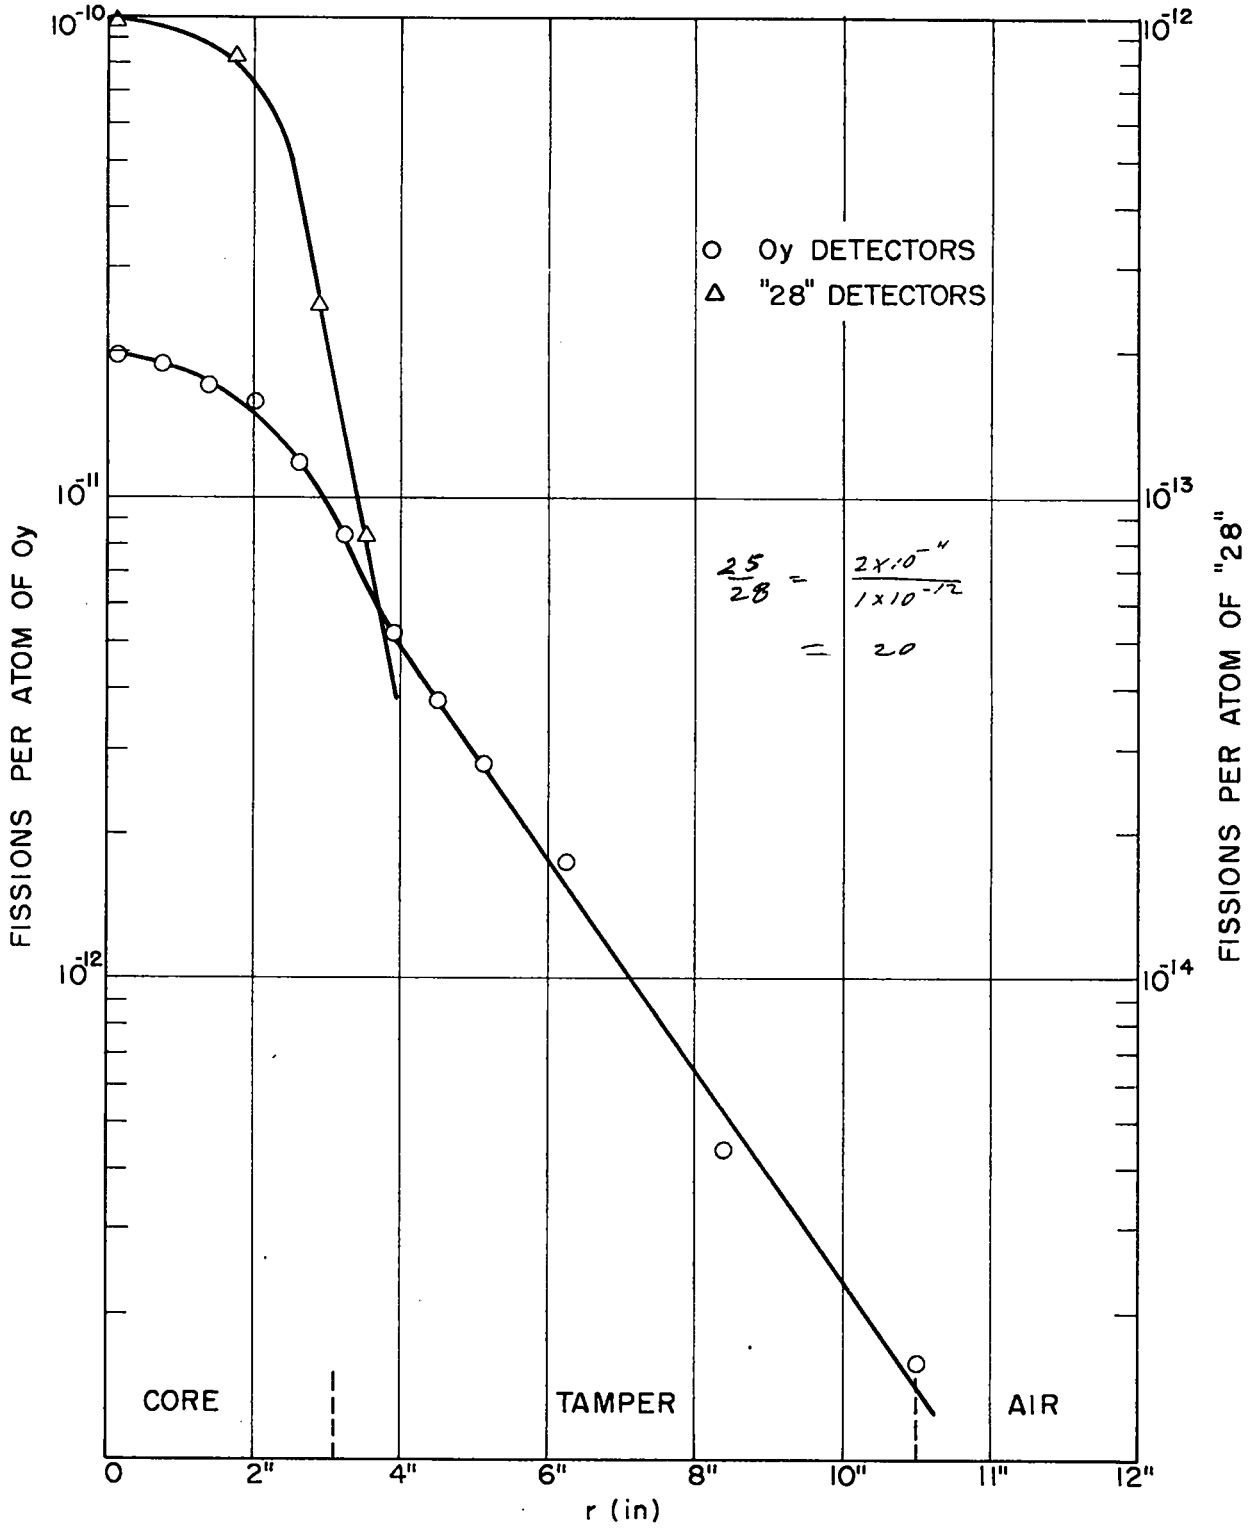

FIG. III - 1. TOPSY - HYDRIDE IN Tu

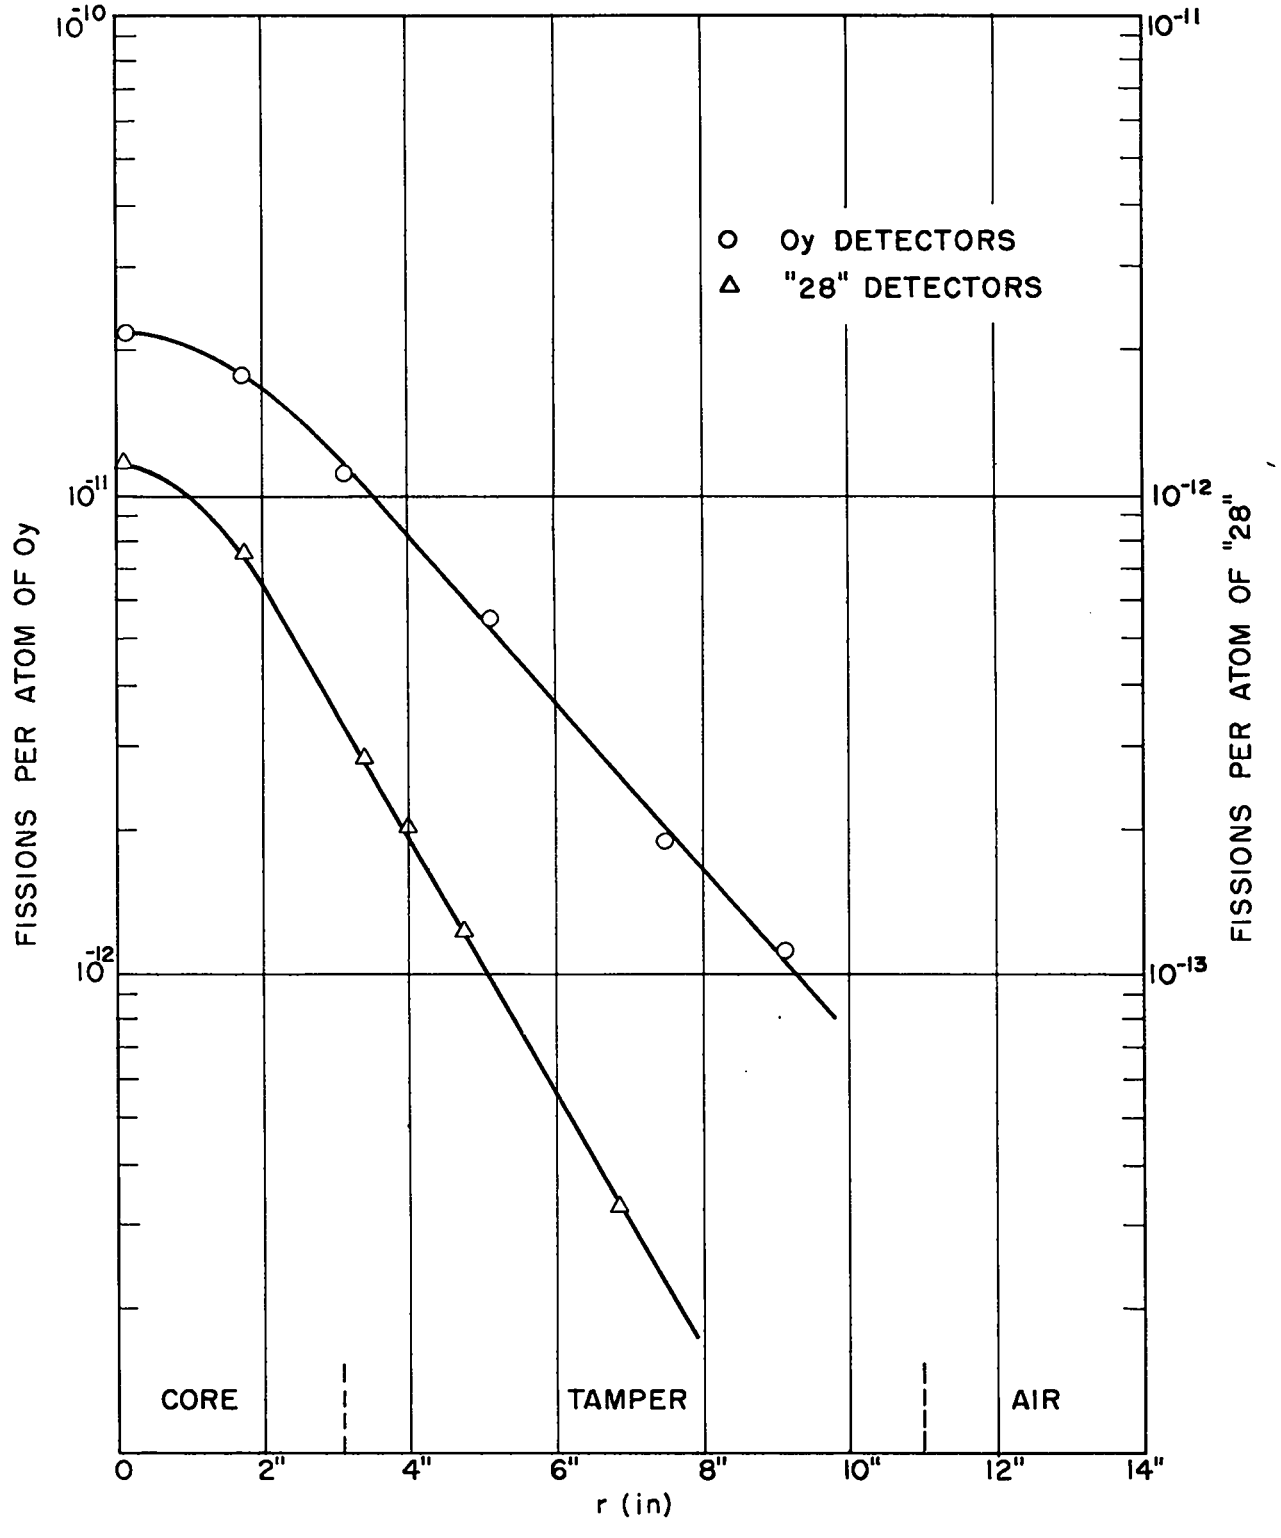

FIG. III-2. TOPSY-HYDRIDE IN Ni

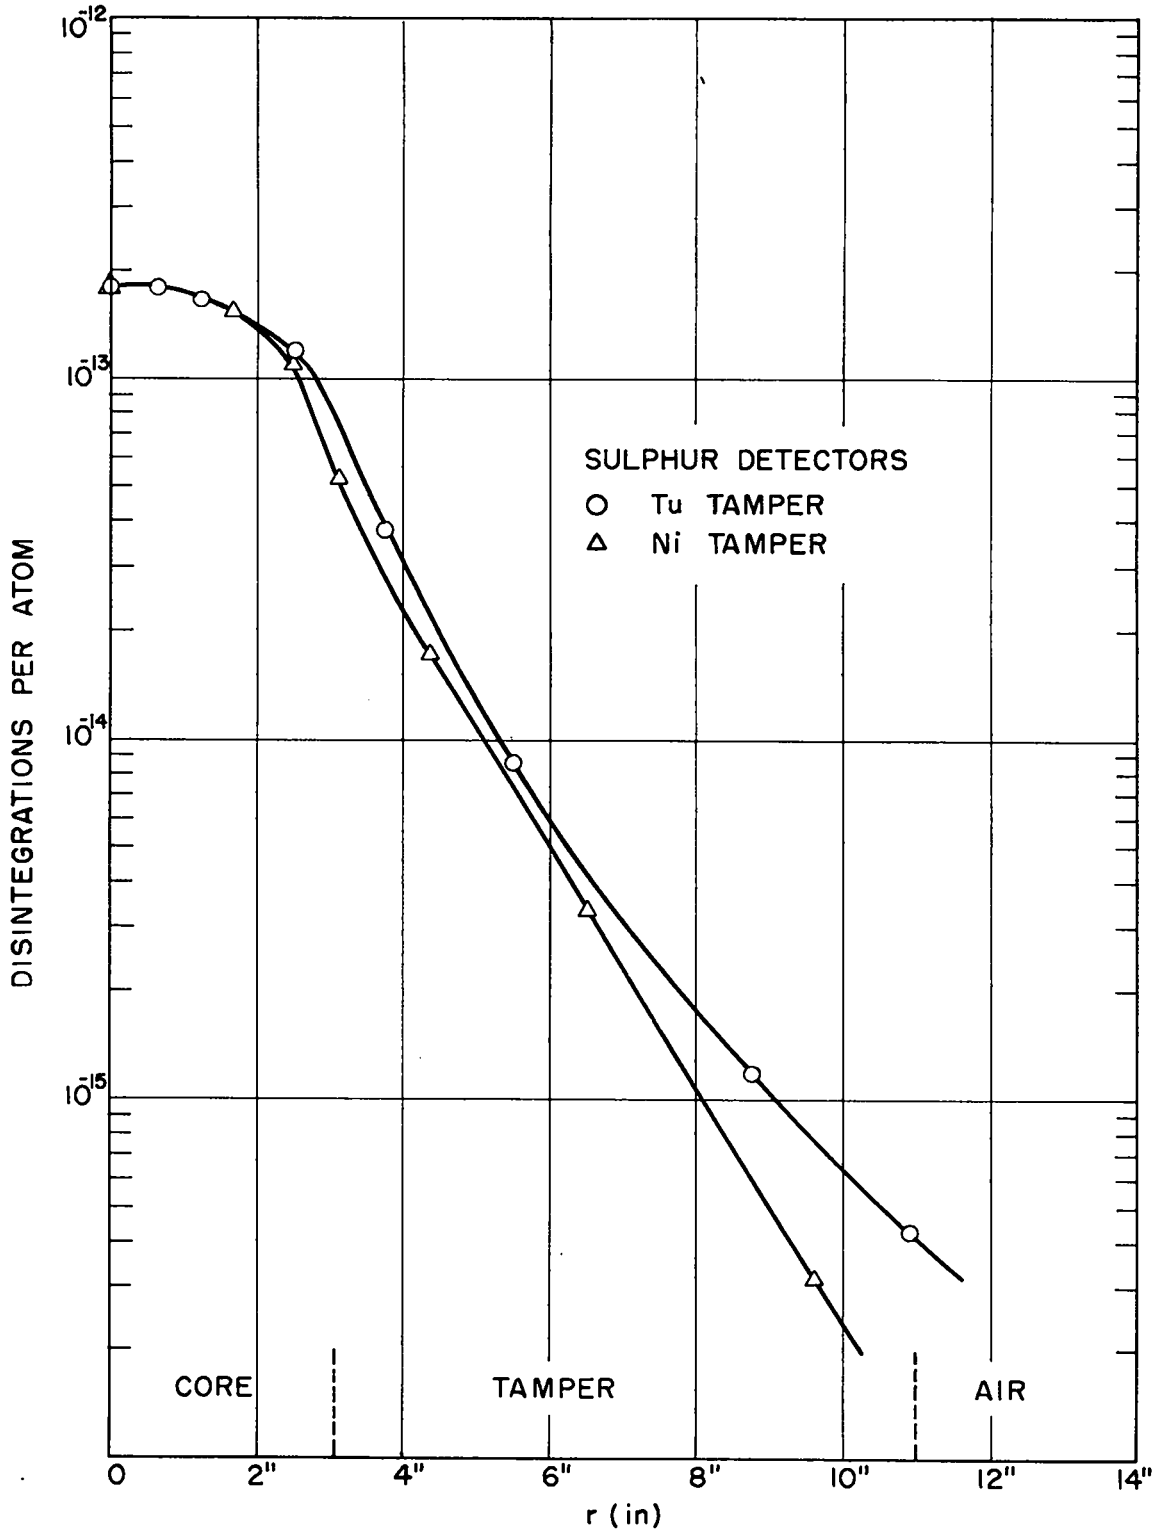

FIG. III-3. TORSY-HYDRIDE

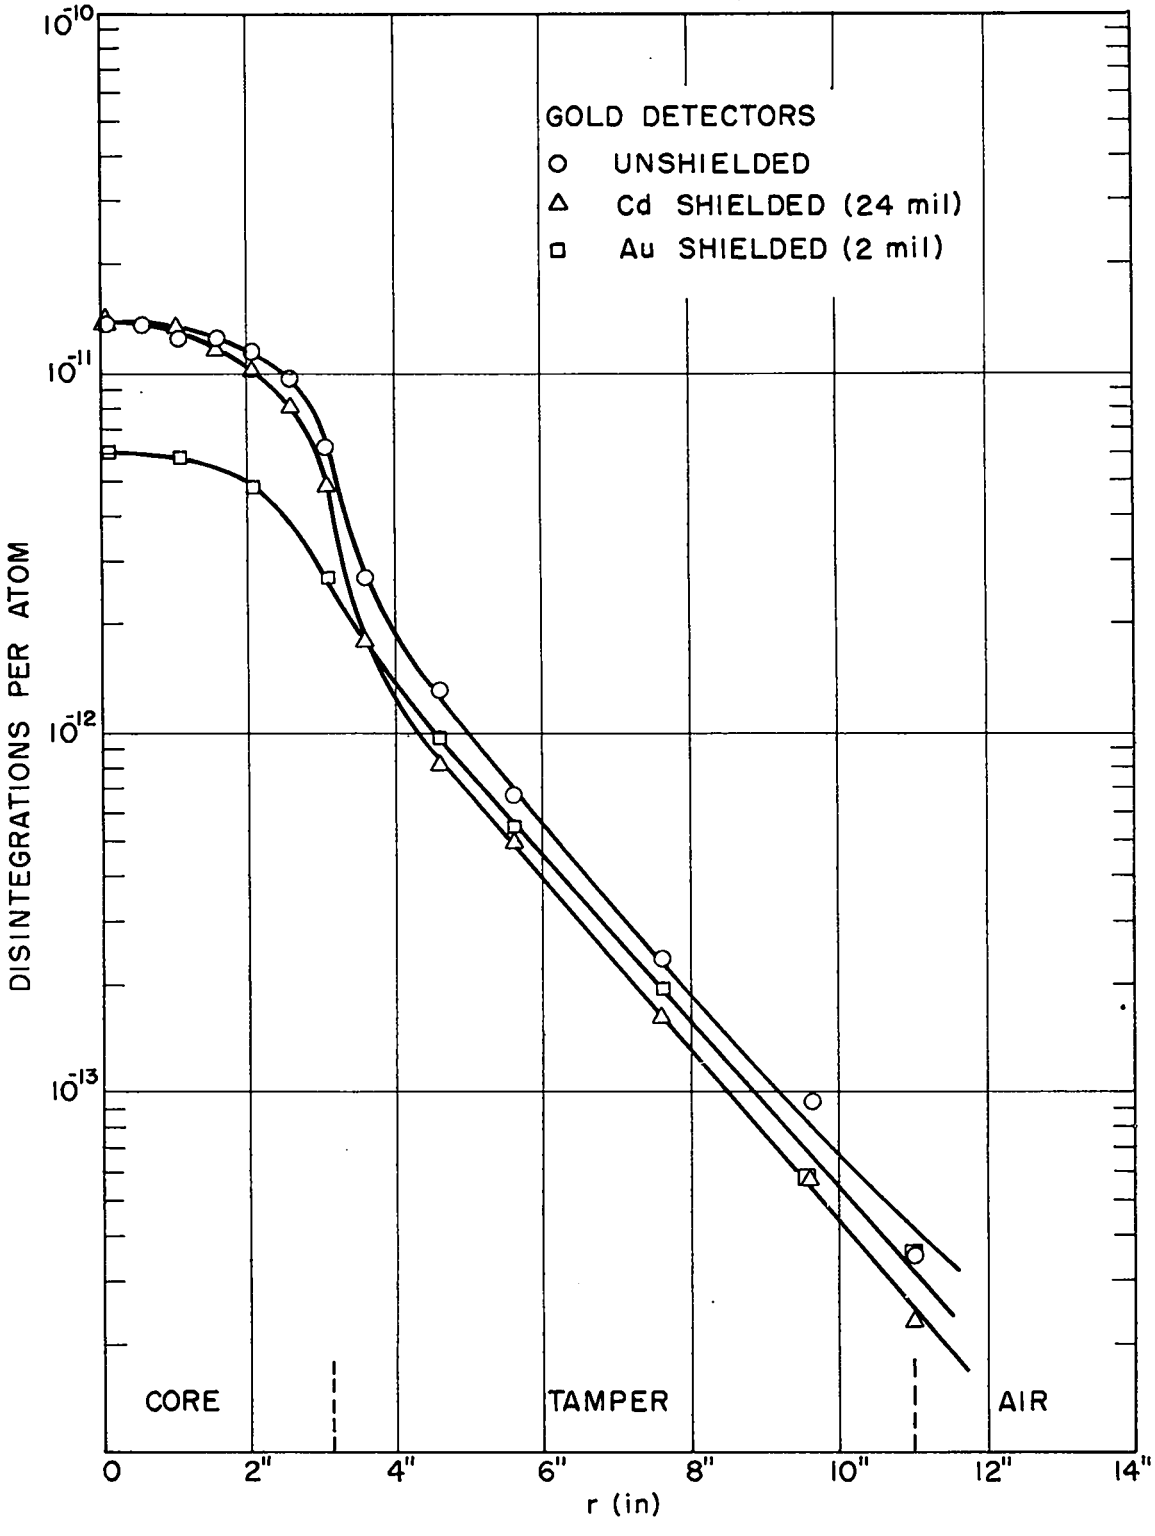

FIG. III-4. TOPSY-HYDRIDE IN Tu

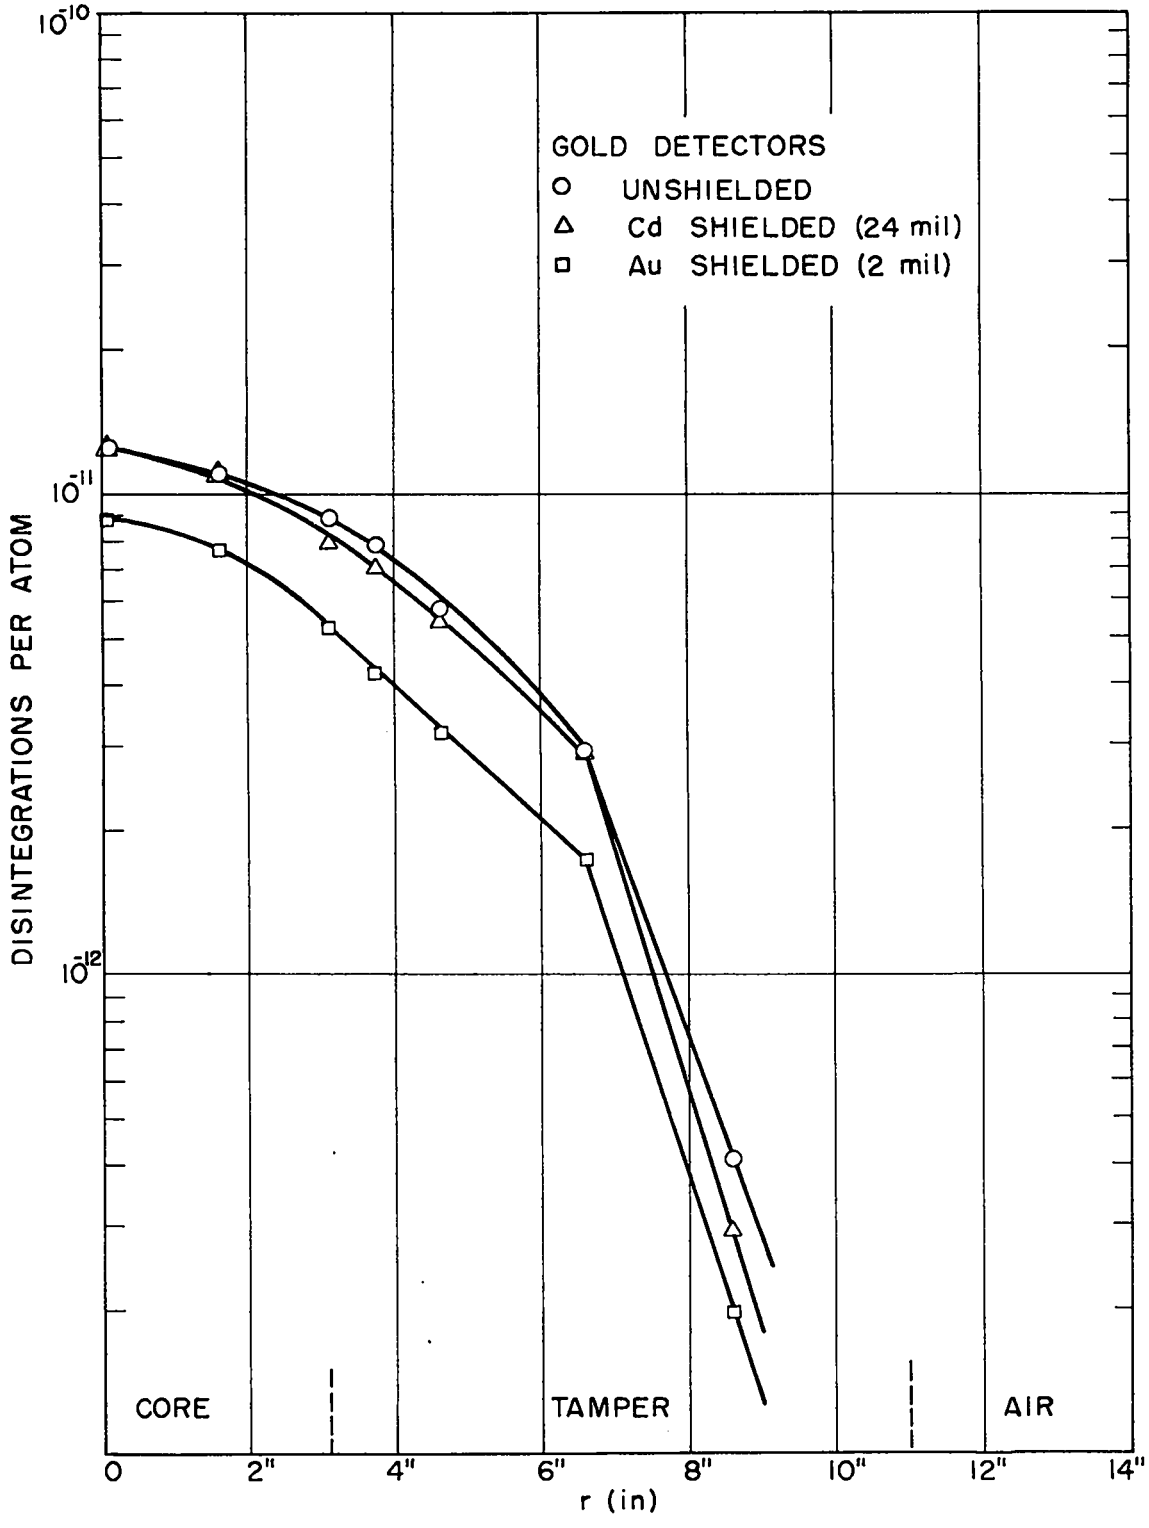

FIG. III-5 TOPSY-HYDRIDE IN Ni

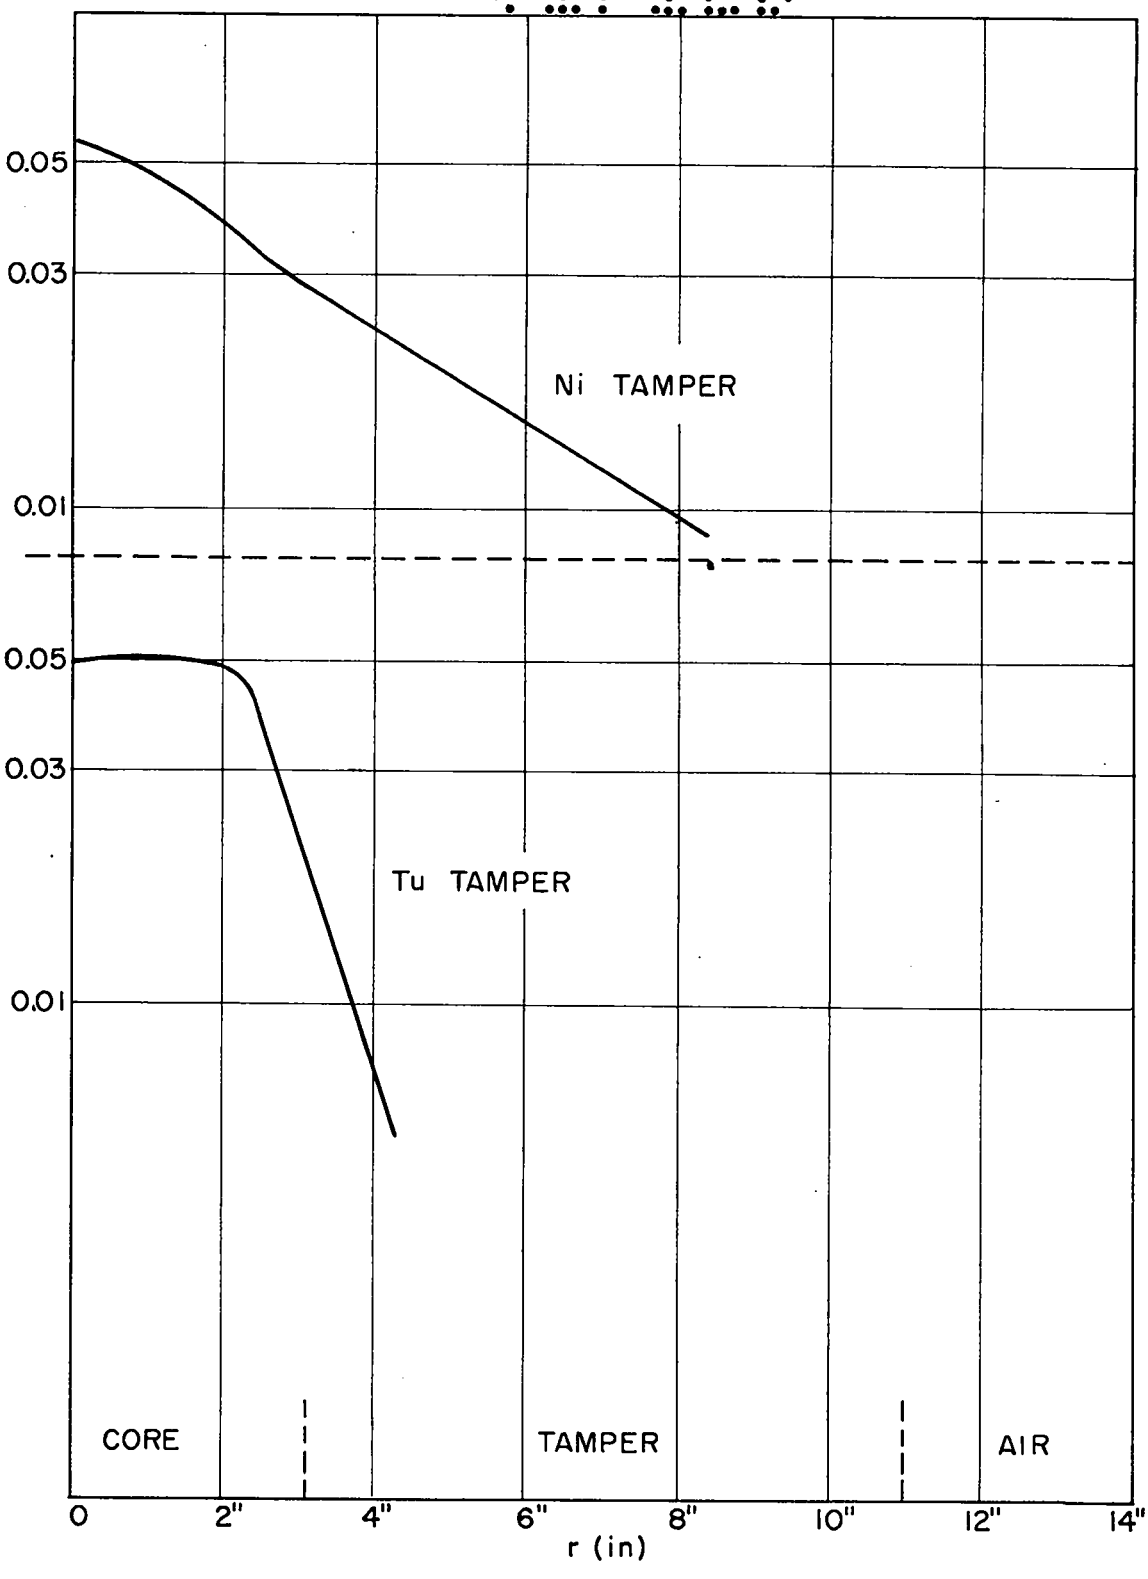

FIG. III-6 TOPSY - HYDRIDE
Ratio 28/Qy. Fission Rates vs Radius

Two qualitative features of these curves are perhaps worth commenting upon. It is seen that the U^{238} fission rate falls off more sharply as a function of radius in the tuballoy tamper than it does in the nickel tamper. This behavior would seem to show that tuballoy more effectively shifts the neutron spectrum toward lower energies than does nickel. With this in mind, it might be expected that gold detectors should show activities which fall off more sharply in nickel than in tuballoy. Just the opposite of this is observed, however, in the first few inches outside of the core. Such a response is probably indicative of the fact that the low energy portion of the spectrum of neutrons emerging from the core has a longer capture mean free path in nickel than in tuballoy.

Aside from such qualitative considerations, however, the main value of these measurements lies in the opportunity offered for comparing observed detector responses with those predicted on the basis of Monte Carlo calculations, as a means of checking the assumed values of cross sections for elastic and inelastic scattering processes that go into such calculations.

[redacted]

PART IV

EFFECTS OF FOREIGN MATERIALS IN HYDRIDE ASSEMBLIES

Method of Measurement

A survey of the effects on reactivity of various foreign materials in the hydride assemblies extended over a 5-month period. Most samples were elements or simple compounds (usually oxides) in the form of pressed or machined ½" cubes. Pressed specimens were prepared by the Powder Metallurgy Section of CMR-6. A few, in powder form, were in 0.5 gm Al containers, ½" diam. x ½" long. The materials came from a wide variety of sources and in most cases contaminants were not checked. The samples were introduced as near the hydride center as possible ($r = 0.8$"), in the tamper adjoining the hydride ($r = 3.35$", interface at $r = 3.08$") and in some cases at intermediate positions.

Measurements were made in terms of control rod change required to restore the system to delayed critical when a sample was placed in a ½" cubic space (some early measurements on the hydride-Tu assembly were of reactivity changes when a hydride cube was replaced by a cube of the material invesitgated; as reduction of results to "air" reference magnified errors, most of these measurements were repeated under better conditions). By means of control rod calibration curves, Figs. IV-1 and IV-2, and sample masses, data were converted to reactivity change in cents per gm-atom or mole. The shapes of control rod calibration curves were obtained in terms of reciprocal multiplication and equivalent hydride mass as a function of control rod position. The cents scale was established by measurement of positive periods corresponding to shifts from delayed critical by known increments of control

[redacted]

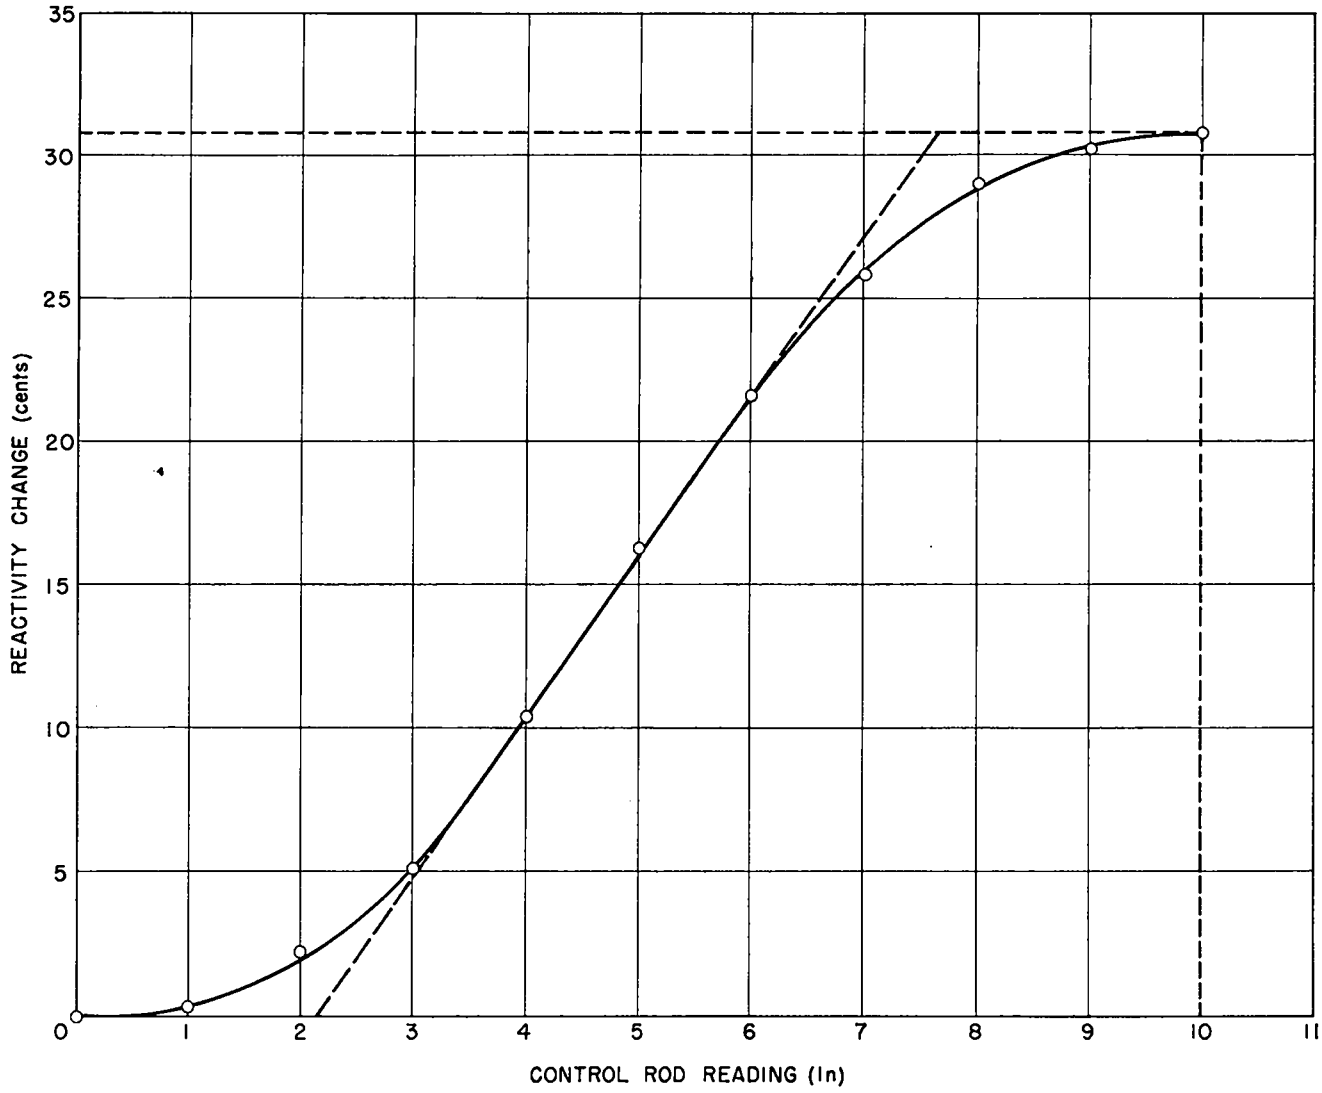

FIG. IV-1 CALIBRATION OF CONTROL ROD NO. 2
HYDRIDE - Tu ASSEMBLY

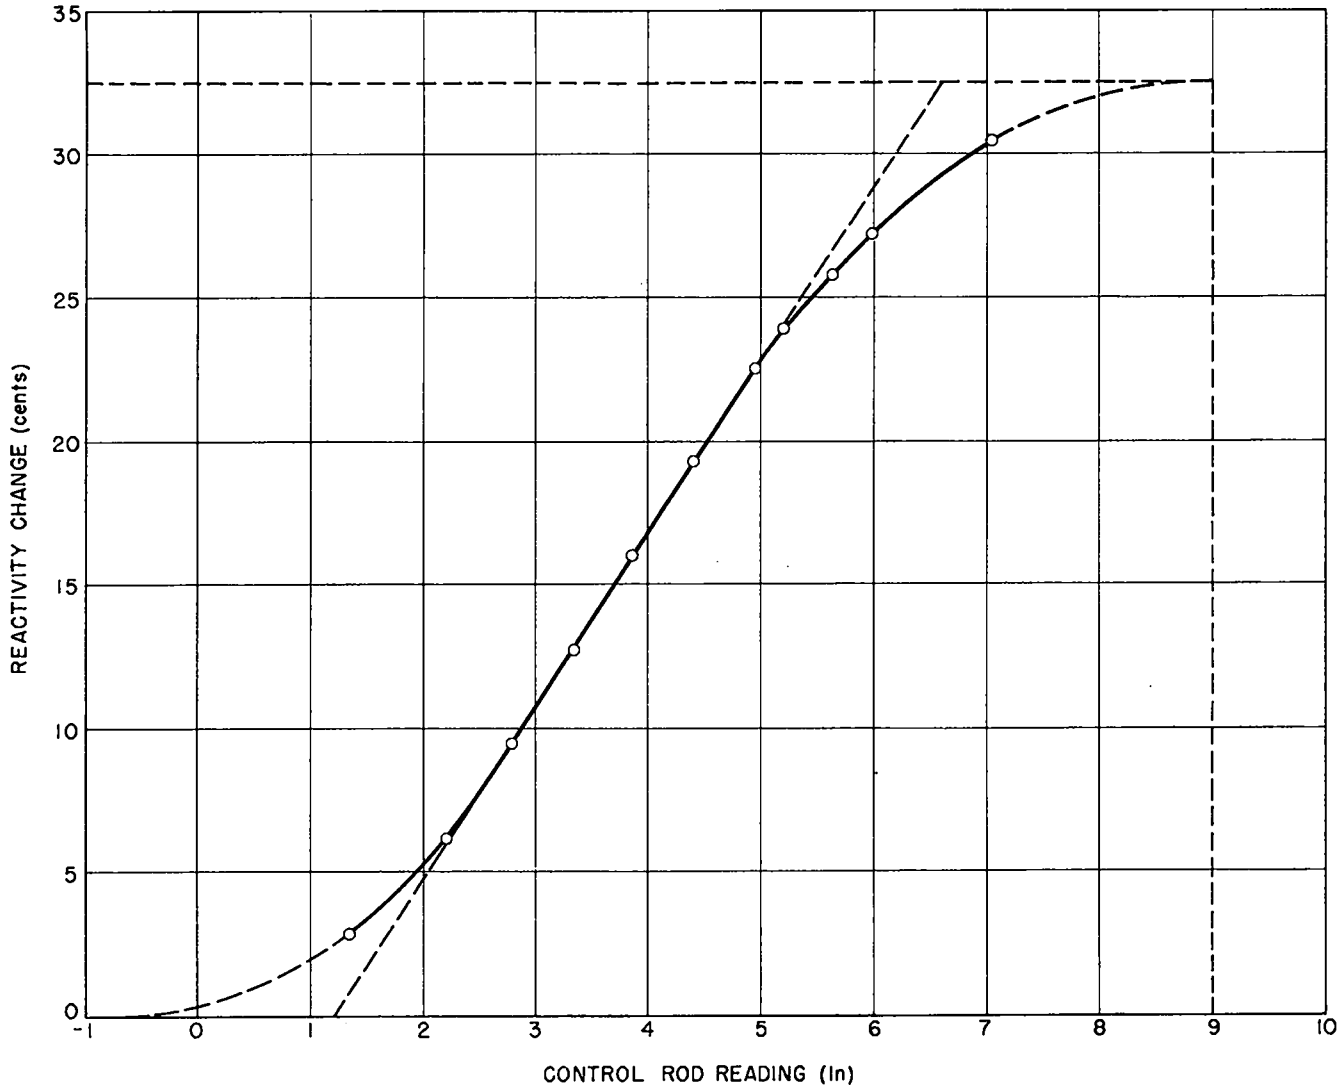

FIG. IV-2 CALIBRATION OF CONTROL ROD NO. 2
HYDRIDE - Ni ASSEMBLY

[redacted]

rod position. De Hoffmann's values[1] of delayed neutron periods and intensity ratios were used to convert to intervals from delayed critical in cents. As the cents scale is unimportant except to allow the comparison of results for different conditions, the details of this conversion are incidental.

Experimental Results

Results of measurements in the three radial positions most generally used are given in Table IV-1 for the Tu and for the Ni-tamped assemblies. The discussion of errors in the notes which follow this table leaves much to be desired, this is a consequence of the decision to devote necessarily limited efforts to a general survey instead of a careful study of a few materials. Several changes in technique in the course of this work presumably improved reliability of results but did not eliminate occasional inconsistencies.

The attempts to reconstruct reactivity changes for compounds and mixtures from values for the elements (values in parentheses for the last four items of Table IV-1), disagree considerably with data obtained directly. In the most important case, Oy-hydride, the average discrepancy is 10% for the Tu tamped assembly and 5% for the Ni tamper. The most careful check on additivity of results was a comparison of measurements on a Pu cube with measurements on the difference between two Pu cubes which differ in weight by 0.92 gm. Based on the 0.92 gm difference, the Pu value is 226 cents/gm-atom (0.8" position, Ni tamper). This compares with 243±8 cents/gm-atom as an average of several values based on 28-29 gm cubes. The difference, 7%, corresponds to an effective error of 0.06 gm Pu (in 0.92 gm) whereas the greatest sensitivity indicated by response to control rod settings is about

(1) Delayed Neutrons from U^{235} after Short Irradiation, F. de Hoffmann, B. T. Feld and P. R. Stein, Phys. Rev. 74, p. 1330 (11/15/48).

[redacted]

[redacted]

TABLE IV-1

EFFECTS OF FOREIGN MATERIALS IN HYDRIDE ASSEMBLIES

reactivity change in cents per gm-atom or mole

dist. from center: (hydride radius 3.08")		0.8"		2.4"		3.35"	
		Tu Tamper	Ni Tamper	Tu Tamper	Ni Tamper	Tu Tamper	Ni Tamper
Z	Material						
1	H(1)	38.5	44	22.5	26.5	5	9
4	Be	10	12	8.5	12.5	5	6.5
5	B	-59.5	-68.5	-30.5	-34.5	-5	-12
6	C	4.5	4.5	6.5	8.5	5	6
7	? N(2)	16				7.5	
8	O(3)	5	4	5		5	5.5
12	Mg	9.5	11.5	12	13.5	5.5	8
13	Al	2.5	4.5	7	8.5	3.5	5
14	Si	3.5	3			4.5	3.5
15	? P	12				6	
16	S	-1	-0.5			1	1.5
21	Sc(4)(5)	9.5					
22	Ti	3.5	7			8	7
23	V	3.5	4.5	10	10.5	10.5	8.5
24	Cr	3				5.5	
25	Mn	-2	-2	5.5	10	8.5	6
26	Fe	2.5	4.5			6	5.5
27	Co	-9.5	-8.5	1	3.5	5	4
28	Ni	-0.5	1	7	8	7.5	6
29	Cu	2	3.5			5.5	6.5
30	Zn	4	3.5			6.5	6.5
32	Ge(5)	3	[redacted]				
33	As	-13	-9.5			5	4

[redacted]

[redacted]

TABLE IV-1

		0.8"		2.4"		3.35"	
		Tu	Ni	Tu	Ni	Tu	Ni
39	Y(4)(5)	-1					
40	Zr(4)(5)	14					
41	Cb	-5	-3.5			6.5	5.5
42	Mo	-2.5	-0.5			7.5	9
45	Rh	-39.5				1	
46	Pd	-20	-17.5			4	2
47	Ag	-49.5	-51			-0.5	-6
48	Cd	-19	-17	-3.5	1.1	3.5	3
49	In	-53	-56.5			-1.5	-9
50	Sn	-0.5	2			5.5	7.5
51	Sb	-31.5	-32			-0.5	-3
52	Te	-5	-4.5			4	2.5
53	I	-53				1	
57	? La(5)	70		53		28	
58	Ce(4)	33				15.5	
60	Nd(4)(5)	3					
62	? Sm(5)	-172		-60		10	
64	Gd(4)(5)	-182				-1	
68	? Er(4)(5)	-58.5					
73	Ta	-69	-69	-29.5	-28	-2	-9
74	W	-22	-22.5	-4.5	-4.5	5.5	3.5
76	Os(5)	-53		-19		7.5	
78	Pt	-24.5	-20.5			5.5	3.5
79	Au	-41	-40	-14.5	-9.5	2	-1
81	Tl	-1	4.5			8	6.5
82	Pb	4	7			10.5	12

[redacted]

TABLE IV-1

		0.8"		2.4"		3.35"	
		Tu	Ni	Tu	Ni	Tu	Ni
83	Bi	7	8	16	18.5	9.5	11.5
90	Th(6)	19	23	23.5	35.5	6	19
92	U	12	17.5	12.5	19.5	10	10
92	Oy	119	134.5	77.5	82	50.5	43
94	Pu	220	243	133	141.5	81.5	69
	WC	-25(-17.5)	-22(-18)			9.5(10.5)	6.5(9.5)
$OyH_{2.97}C_{1.11}O_{0.25}$	(5)	215(240)	254(272)	133(153)	166(171)	76(73)	
$UH_{3.23}C_{.89}O_{.18}$	(5)	109(141)		72.5(92)			
$C_5H_8O_2$	(5)	328(340)		182(222)		74(75)	

(1) From measurements on polythene and C.

(2) From measurements on TiN and Ti.

(3) From measurements on Al_2O_3 and Al.

(4) From measurements on the oxide.

(5) Samples small, so errors per gm-atom relatively large.

(6) Results not reproducible, evidence of systematic change (low density pressed powder sample).

Values in parentheses computed from results for component elements; several steps involved so errors magnified.

Operation more stable for measurements giving underlined values than for others.

Errors: A number of underlined values were from repetitions of earliest measurements. For 21 normal samples, differences ranged from 0.0 to 0.8 unit, corresponding to a probable error of ± 0.3 unit (in relative values for a given tamper). In addition, there were 4 wild cases with differences of 1.4 to 2.9 units. Absolute values (for comparison between Tu and Ni tampers) have an added uncertainty which should be within ± 5%. Systematic differences (between Tu and Ni tampers) may suggest a larger calibration error.